
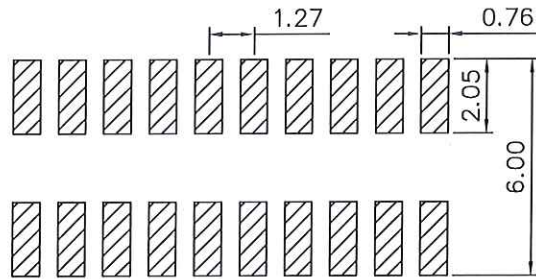

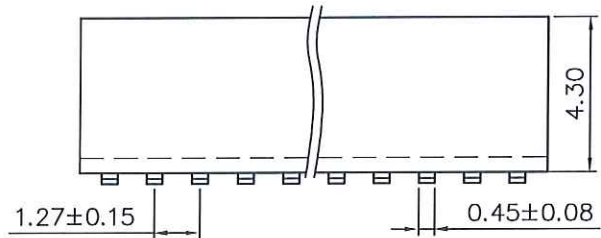


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

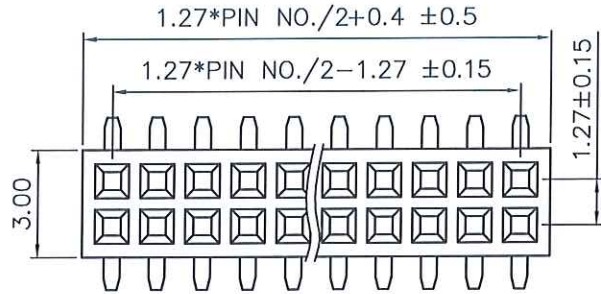

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ± 0.05 (TOP VIEW)

2*2~2*15P		0.10
2*16~2*20P		0.12
2*21~2*40P		0.15

NOTE:

- MATERIAL SPECIFICATION:
1-1.HOUSING: THERMOPLASTIC HIGH TEMP,UL94V-0
1-2.CONTACTS: PHOSPHOR BRONZE Δ
- PLATING SPECIFICATION:
2-1.CONTACTS:
TIN/GOLD FLASH PLATED OVER ALL.
- ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 1A AC/DC
3-2.CONTACT RESISTANCE: 20 m Ω MAX
3-3.INSULATION RESISTANCE: 1000M Ω Min
3-4.DIELECTRIC WITHSTANDING : 300V
- ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- PACKAGE SPEC: REEL

6P/N:

SERIES NO: FH1276 43 F 0-2 XX 2 X X X 05
HEIGHT: 43: 4.3mm
MALE FEMALE: F-FEMALE
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PIN Q'PY: XXPIN
HOUSING: 1-PA6T
COLOR: A-BLACK
PLATING: A-ALL AU G/F
TERMIPOINT: 2-SMT

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES	SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	22.05.09	LINEAR	APPROVED	3/8/20	25.1.7	FH127643F0-2XX2XXX05	ENDE05		
A1	UPDATE TERMINAL MATERIAL	25.01.06	0.0 $\pm$ 0.35	DESIGNER	丁江	25.10.07	TITLE: 1.27mm Pitch 双排排针 SMT H4.3 W3.0		REV: A1	SHEET: 1/1
			UNIT:mm	DRAWN	黄国栋	25.01.07				
			SIZE: A4							