
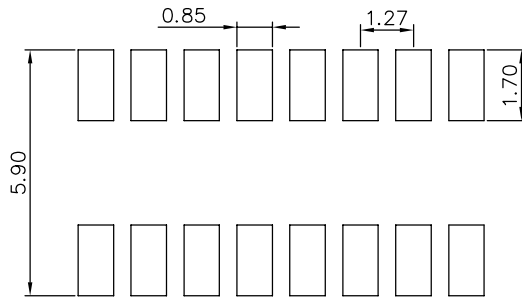
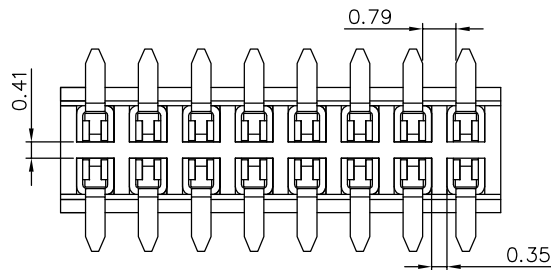

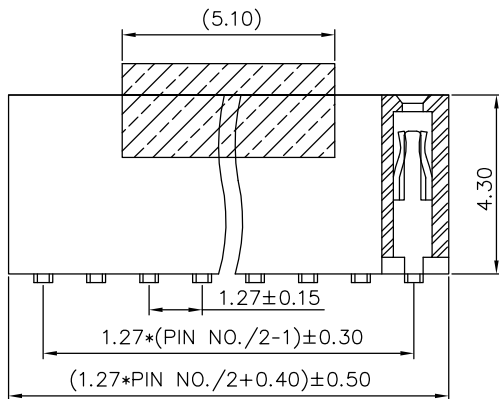


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

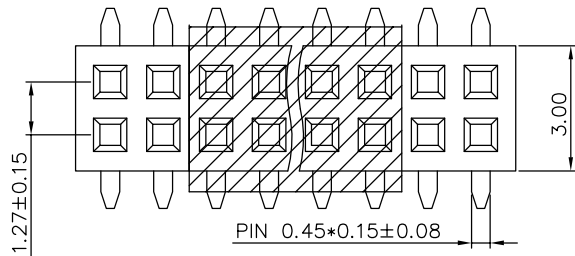


RECOMMEND P. C. B LAYOUT

PCB TOLERANCE: ±0.05 (TOP VIEW)

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: THERMOPLASTIC HIGH TEMP,UL94V-0
  - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
  - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
  - 3-1.RETENTIVITY FORCE: 0.2KGF/pin min
  - 3-2.DURABILITY: 100 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
  - 4-1.CURRENT RATING: 1A AC/DC
  - 4-2.CONTACT RESISTANCE: 20 mΩ MAX
  - 4-3.INSULATION RESISTANCE: 1000MΩ Min
  - 4-4.DIELECTRIC WITHSTANDING : 300V
- 5.ENVIRONMENTAL PERFORMANCE:
  - 5-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 6.PACKAGE SPEC: REEL
- 7.P/N:

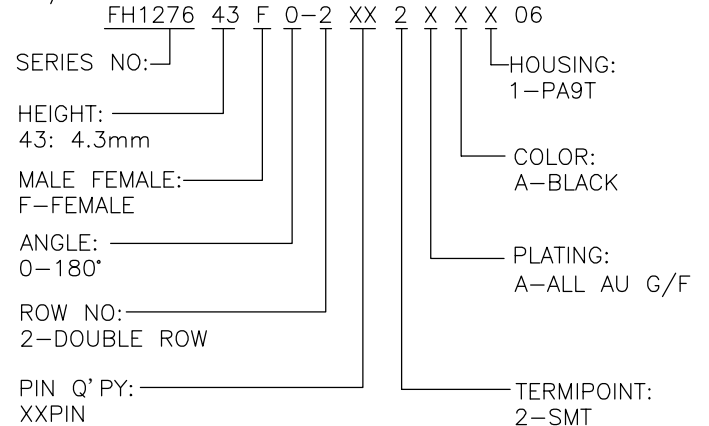

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	FH127643F0-2XX2XXX06	ENDE05	
			0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	22.05.09	TITLE:			
			UNIT:mm	X'±3°	DRAWN	LanXuan_Hou	22.05.09	1.27mm Pitch 双排排针 SMT H4.3 W3.0			
			SIZE: A4	0.000±0.10	X'X' ±2°					REV: A0	SHEET: 1/1