
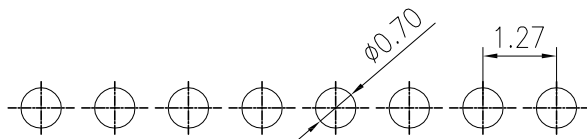

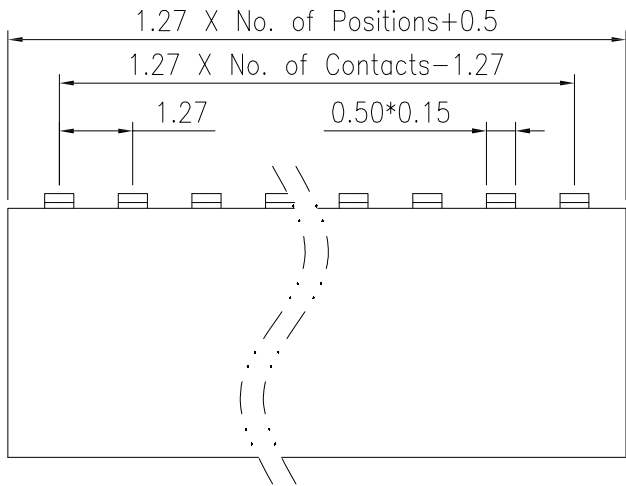


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

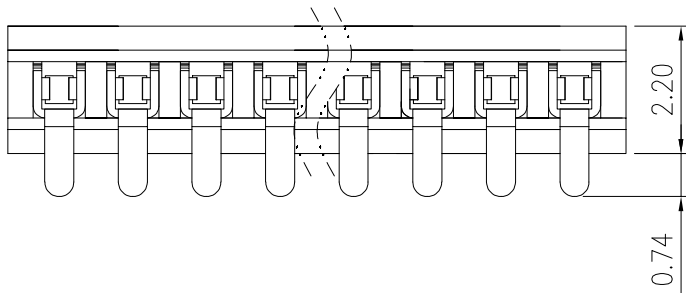

RECOMMENDED P.C.B LAYOUT

P.C.B TOLERANCE: ±0.05

NOTE:

1. MATERIAL SPECIFICATION:
 - 1-1. HOUSING: PA6T+30%G.F.(UL94V-0).
 - 1-2. CONTACTS: BRASS
2. PLATING SPECIFICATION:
 - 2-1. CONTACTS: NICKEL BASE, G/F GOLD PLATED SURFACE.
3. MECHANICAL PERFORMANCE:
 - 3-1. INSERTION FORCE: 0.15kgf MAX
 - 3-2. REMOVAL FORCE: 0.03kgf MIN
 - 3-3. RETENTIVITY FORCE: 0.20Kgf/PIN MIN
 - 3-4. DURABILITY: 100 CYCLES.
4. ELECTRICAL PERFORMANCE:
 - 4-1. CURRENT RATING: 1A
 - 4-2. VOLTAGE RATING: 300V
 - 4-3. CONTACT RESISTANCE: 20mΩ Max.
 - 4-4. INSULATION RESISTANCE: 1000MΩ MIN
 - 4-5. WITHSTANDING VOLTAGE: AC 300V 60S
5. ENVIRONMENTAL PERFORMANCE:
 - 5-1. OPERATING TEMPERATURE: -40°C~+105°C.
 - 5-2. SALT FOG: 24H
 - 5-3. MOISTURE SENSITIVITY RATING (MSD): LEVEL 2
6. PACKAGE SPEC: REEL
7. P/N:

FH1276 43 F 9-1 XX 1 X X X 01

SERIES NO: _____ HOUSING: 1-PA6T

HEIGHT: _____ COLOR: A-BLACK

43: 4.3mm

MALE FEMALE: _____ PLATING: A-ALL AU G/F

F-FEMALE

ANGLE: _____


9-90°

ROW NO: _____

1-SINGLE ROW

PIN Q' PY: _____ TERMPIPOINT: 1-DIP

02~40

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	FH127643F9-1XX1XXX01	ENDE05	
			0.00±0.25	X'±3°	DESIGNER	Han_Gao	22.10.28	TITLE:		REV: A0 SHEET: 1/1	
			0.000±0.10	X'X' ±2°	DRAWN	LanXuan_Hou	22.10.28	Pitch 1.27mm 90° 单排排母H4.3			