
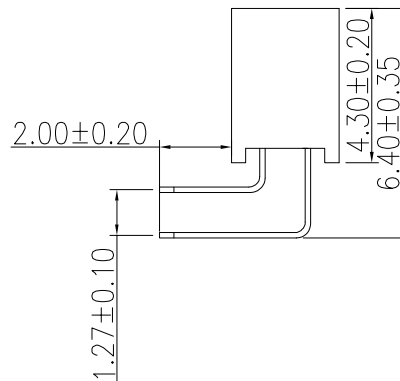
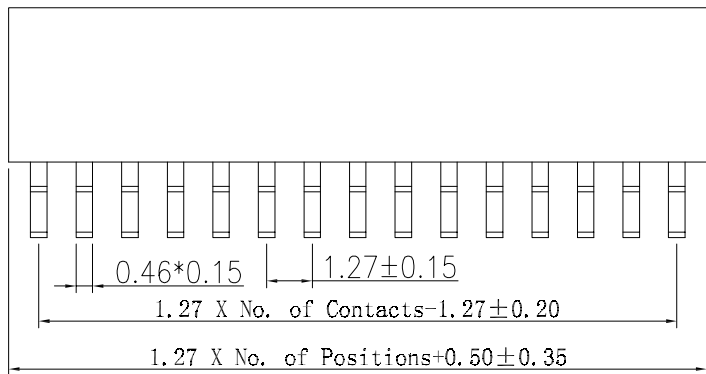


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements



RoHS

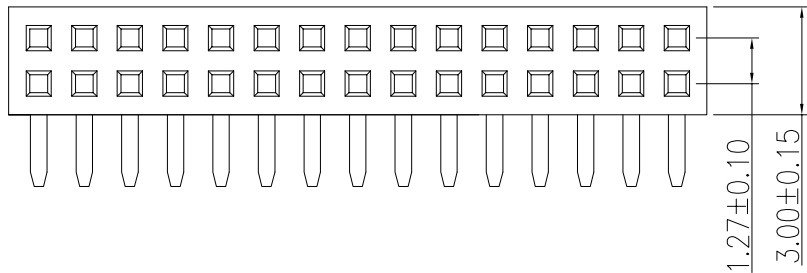


NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: LCP,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 1A
 - 3-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 300V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: TUBE

6.P/N:

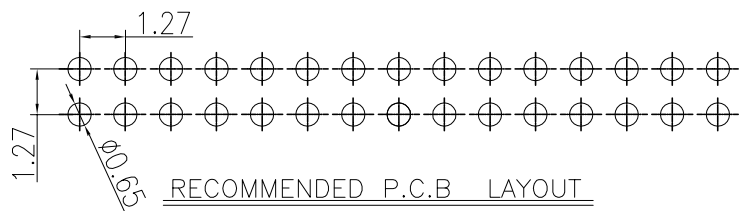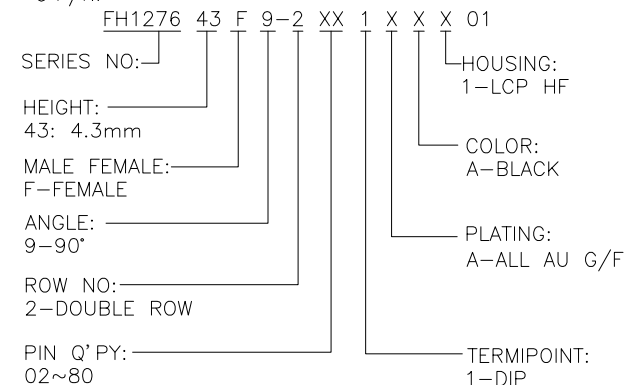

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE:±0.05

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	1:1	APPROVED	DESIGNER	TITLE:	ENDE05	
			0.00±0.25	X'±3'		Wang_jr	Han_Gao	Pitch 1.27mm 90° 双排排母H4.3 W3.0 PC2.0			
			0.00±0.10	X'X' ±2'		LanXuan_Hou					REV: A0 SHEET: 1/1