




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS

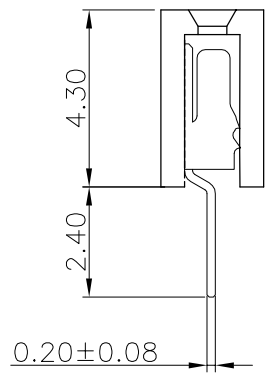

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PA6T,UL94V-0
 1-2.CONTACTS: BRASS
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 GOLD FLASH/TIN OVER NICKEL
 3.ELECTRICAL PERFORMANCE:
 3-1.CURRENT RATING: 2A
 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 3-3.INSULATION RESISTANCE: 1000MΩ Min
 3-4.DIELECTRIC WITHSTANDING : 300V
 4.ENVIRONMENTAL PERFORMANCE:
 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
 5.PACKAGE SPEC: REEL
 6.P/N:

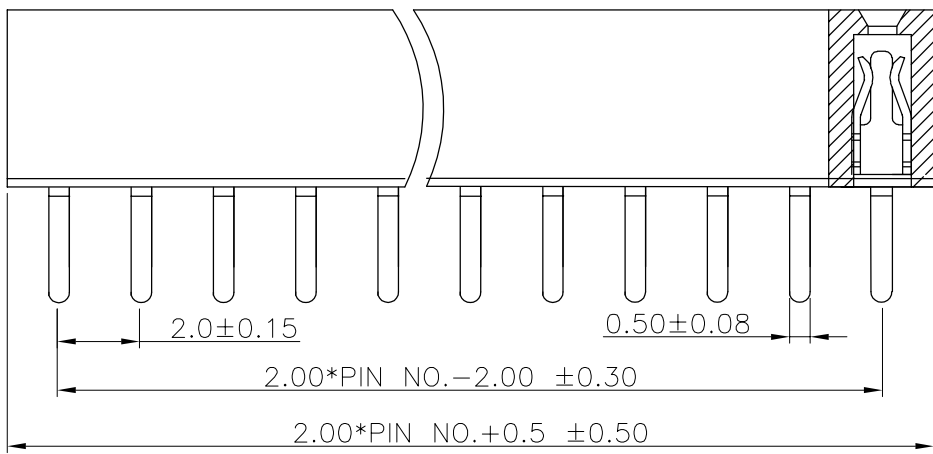

FH2005 43 F 0-1 XX 1 X X X 01
 SERIES NO: _____ HOUSING:
 1-PA6T
 2-PA6T HF
 HEIGHT: _____ COLOR:
 43: 4.3mm A-BLACK
 MALE FEMALE: _____ PLATING:
 F-FEMALE A-ALL AU G/F
 ANGLE: _____ 0-180°
 ROW NO: _____ 1-SINGLE ROW
 PIN Q'PY: _____ TERMIPOINT:
 02~40 1-DIP

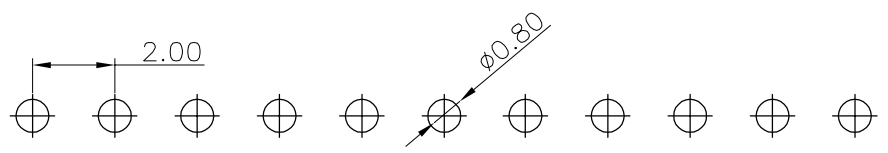

RECOMMENDED PCB LAYOUT
 (GENERAL TOLERANCE:±0.05)

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH200543F0-1XX1XXX01	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15				
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE: 2.0单排母H4.3W2.5 180度 PC2.4 系列	REV: A0		SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15				