


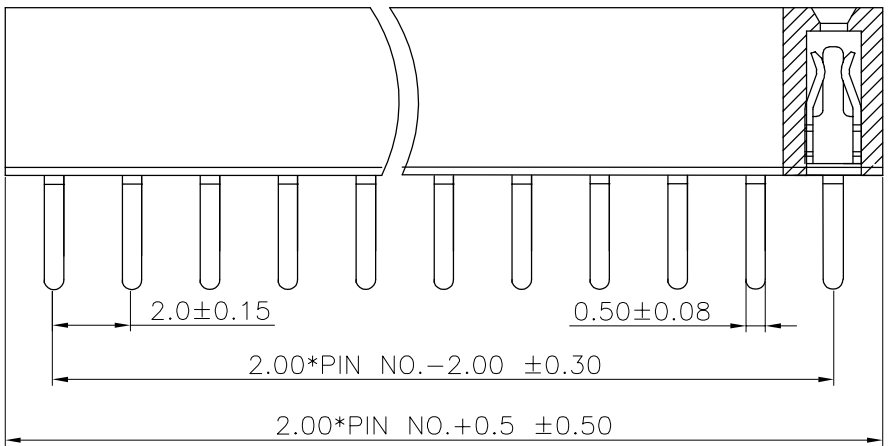


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements



NOTE:  
 1.MATERIAL SPECIFICATION:  
 1-1.HOUSING: PA6T,UL94V-0  
 1-2.CONTACTS: BRASS  
 2.PLATING SPECIFICATION:  
 2-1.CONTACTS:  
 GOLD FLASH/TIN OVER NICKEL  
 3.ELECTRICAL PERFORMANCE:  
 3-1.CURRENT RATING: 2A  
 3-2.CONTACT RESISTANCE: 30 mΩ MAX  
 3-3.INSULATION RESISTANCE: 1000MΩ Min  
 3-4.DIELECTRIC WITHSTANDING : 300V  
 4.ENVIRONMENTAL PERFORMANCE:  
 4-1.OPERATING TEMPERATURE: -40°C~+105°C.  
 5.PACKAGE SPEC: 01~05P--PE BAG  
 06~40P--TRAY

6.P/N:  
 FH2005 43 F 0-1 XX 1 X X X 02  
 SERIES NO: \_\_\_\_\_ HOUSING: 1-PA6T  
 HEIGHT: \_\_\_\_\_ 43: 4.3mm COLOR: A-BLACK  
 MALE FEMALE: \_\_\_\_\_ F-FEMALE PLATING: A-ALL AU G/F  
 ANGLE: \_\_\_\_\_ 0-180°  
 ROW NO: \_\_\_\_\_ 1-SINGLE ROW  
 PIN Q'PY: \_\_\_\_\_ TERMPOINT: 1-DIP  
 02~40

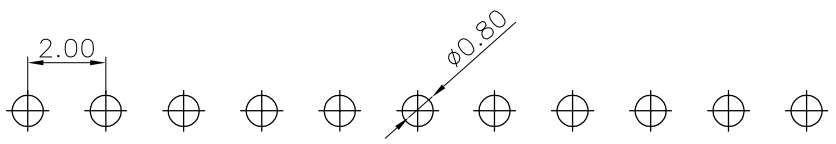

PCB LAYOUT

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH200543F0-1XX1XXX02	DWG.NO: ENDE05		
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15				
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE: 2.0单排母H4.3W2.5 180度 PC3.0 系列	REV: A0		SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15				