
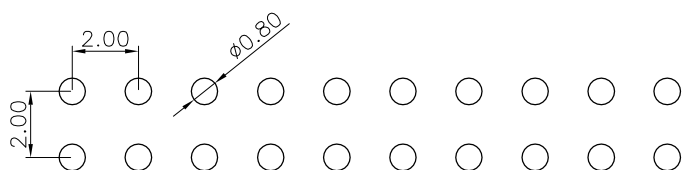

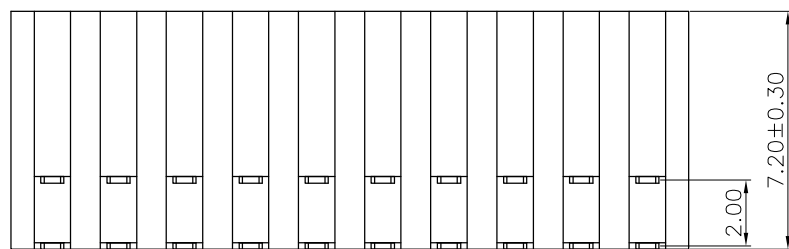


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

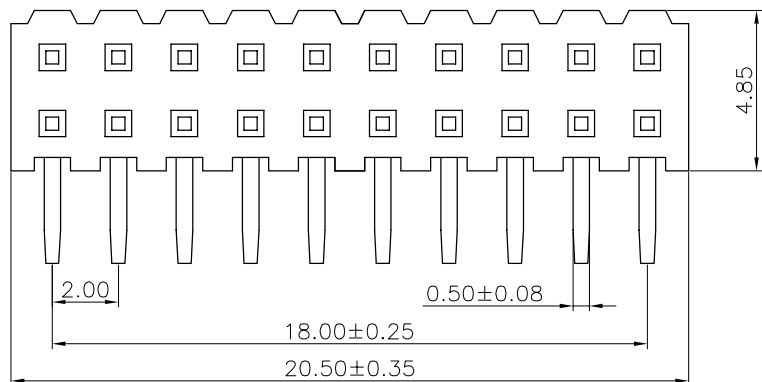

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE:±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.HOUSING: UL94V-0
1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
- 4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: TUBE
- 6.P/N:

FH2005 49 F 9-2 XX 1 X X X 01
 SERIES NO: _____ HOUSING: 1-PA6T
 HEIGHT: _____ COLOR: A-BLACK
 49: 4.85mm
 MALE FEMALE: _____ PLATING: A-ALL AU G/F
 F-FEMALE
 ANGLE: _____ 9-90°
 ROW NO: _____ 2-DOUBLE ROW
 PIN Q' PY: _____ TERMIPOINT: 02~80
 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28	FH200549F9-2XX1XXX01	ENDE05	
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	22.10.28	TITLE:		WanLian Technology Co., Ltd REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	LanXuan_Hou	22.10.28	Pitch 2.00mm 双排 排母 DIP 侧插SERIES		