

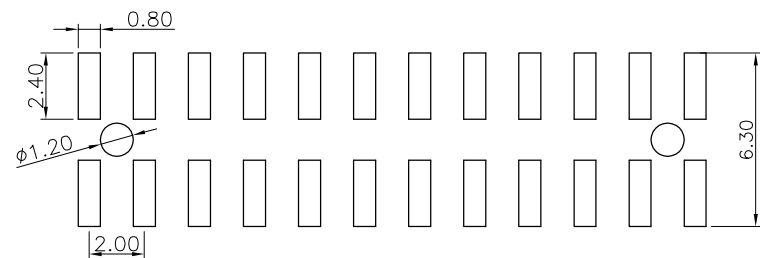
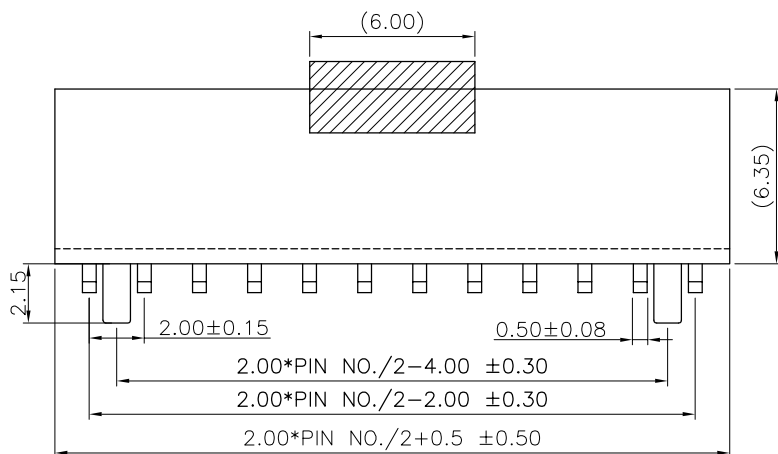


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

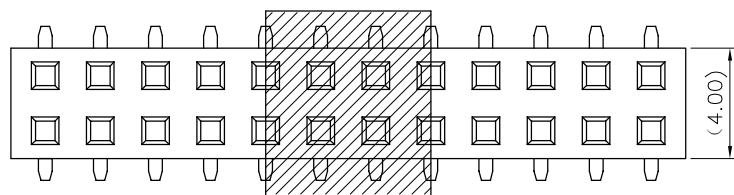

RECOMMENDED P.C.B LAYOUT
 P.C.B TOLERANCE:±0.05

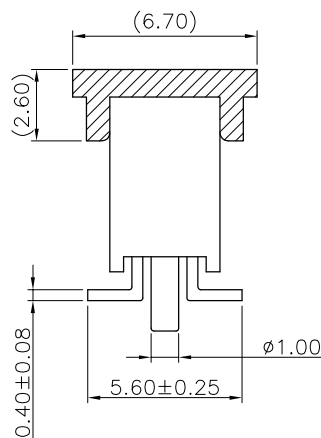

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 2A
 - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 300V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: REEL
- 6.P/N:

FH2005 64 F 0-2 XX 2 X X X 01

SERIES NO: _____ HOUSING: 1-PA6T

HEIGHT: _____ COLOR: A-BLACK

64: 6.35mm

MALE FEMALE: _____ PLATING: A-ALL AU G/F

F-FEMALE

ANGLE: _____ PLATING: A-ALL AU G/F

0-180°

ROW NO: _____

2-DOUBLE ROW

PIN Q'PY: _____ TERMIPOINT: 2-SMT

02~80

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1	Wang_jr	21.10.15	FH200564F0-2XX2XXX01	ENDE05	
			0.00±0.25	X'±3'	APPROVED	Gao_Han	21.10.15	TITLE:		REV: A0	SHEET: 1/1
			0.000±0.10	X'X' ±2'	DESIGNER	Gao_Han	21.10.15	2.0双排母H6.35W4.0 2XNP SMT带柱+CAP PC5.6			
			SIZE: A4		DRAWN	Gao_Han	21.10.15				