
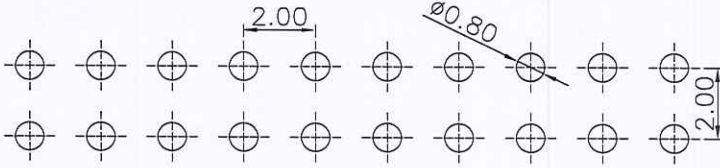
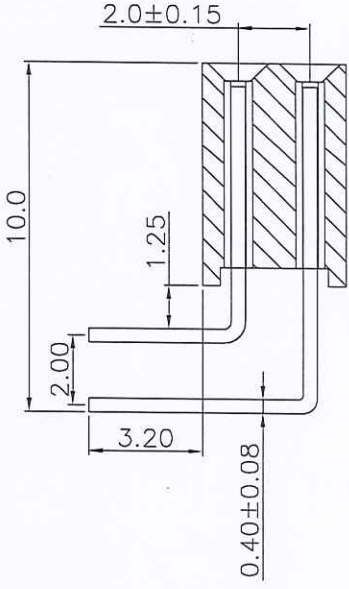
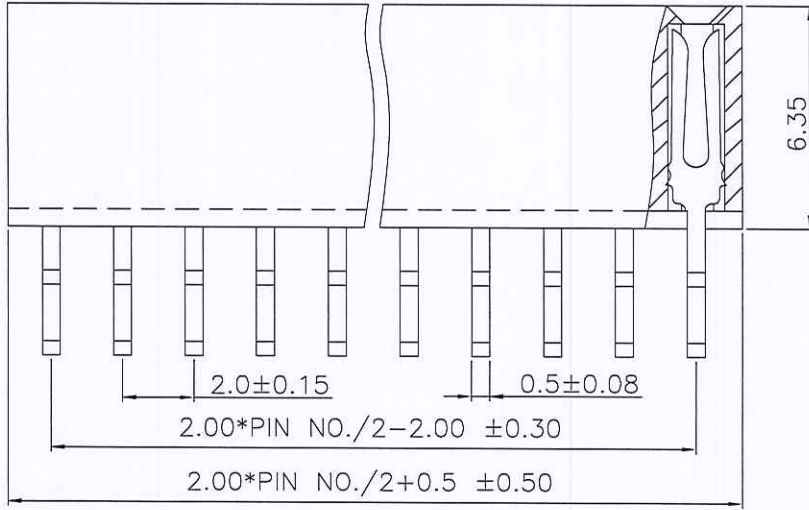
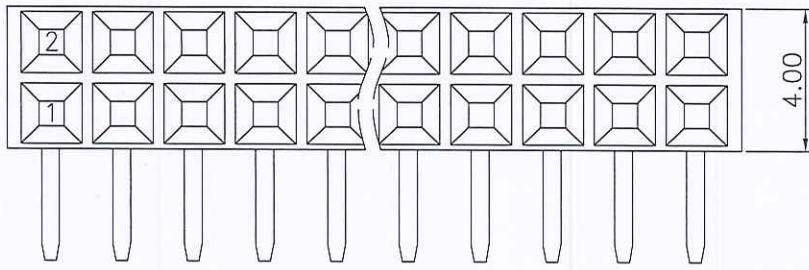


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

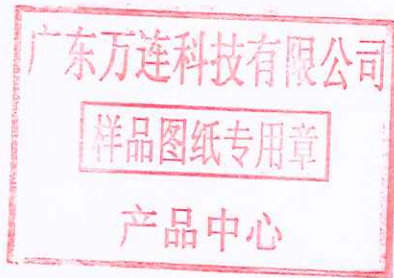

RECOMMENDED PCB LAYOUT  
(GENERAL TOLERANCE: ±0.05)

- NOTE:
- MATERIAL SPECIFICATION:
    - 1-1.HOUSING: THERMOPLASTIC HIGH TEMP,UL94V-0
    - 1-2.CONTACTS: BRASS
  - PLATING SPECIFICATION:
    - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
  - ELECTRICAL PERFORMANCE:
    - 3-1.CURRENT RATING: 2A
    - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
    - 3-3.INSULATION RESISTANCE: 1000MΩ Min
    - 3-4.DIELECTRIC WITHSTANDING : 300V
  - ENVIRONMENTAL PERFORMANCE:
    - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
  - PACKAGE SPEC: TRAY
  - P/N:

FH2005 64 F 9-2 XX 1 X X X 04

SERIES NO: \_\_\_\_\_ HOUSING: 2-PA6T

HEIGHT: \_\_\_\_\_ COLOR: A-BLACK

64: 6.35mm PLATING: A-ALL AU G/F

MALE FEMALE: \_\_\_\_\_ TERMPOINT: 1-DIP

F-FEMALE

ANGLE: \_\_\_\_\_

9-90°

ROW NO: \_\_\_\_\_

2-DOUBLE ROW

PIN Q'PY: \_\_\_\_\_

04~80

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1	Wang_jr	21.10.15	FH200564F9-2XX1XXX04	ENDE05	
			0.0±0.35	X'REF±6°	APPROVED	Gao_Han	21.10.15				
			0.00±0.25	X'±3°	DESIGNER	Gao_Han	21.10.15	TITLE:			
			0.000±0.10	X'X' ±2°	DRAWN	Gao_Han	21.10.15	Pitch 2.00mm 90° 双排 DIP Y型排母 H6.35 W4.0 PC3.2		REV: A0	SHEET: 1/1