

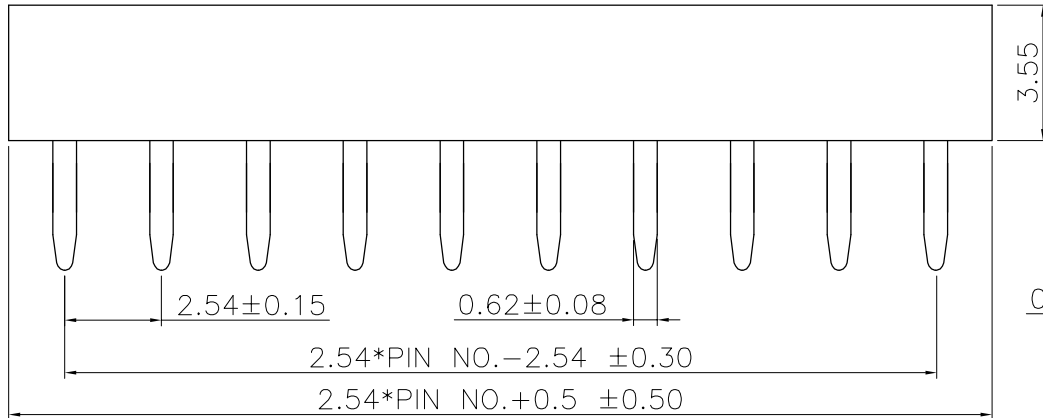


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS




NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: LCP,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH/TIN OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A
 - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: PE BAG(1-6P)/ TRAY(7-40P)

6.P/N:

SERIES NO: FH2541 36 F 0-1 XX 1 X X X 01
 HEIGHT: 36: 3.55mm
 MALE FEMALE: F-FEMALE
 ANGLE: 0-180°
 ROW NO: 1-SINGLE ROW
 PIN Q'PY: 01~40
 HOUSING: 1-PA6T 2-PA6T+HF 3-LCP
 COLOR: A-BLACK
 PLATING: A-ALL AU G/F
 TERMIPOINT: 1-DIP



RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ± 0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15	FH254136F0-1XX1XXX01	ENDE05	
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE:		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15	2.54 180度 单排 H3.55 W2.5 DIP U型排母 PC3.4 系列		