
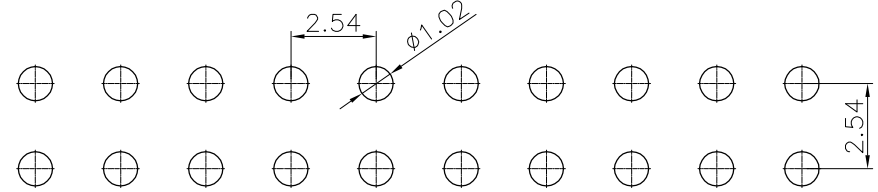

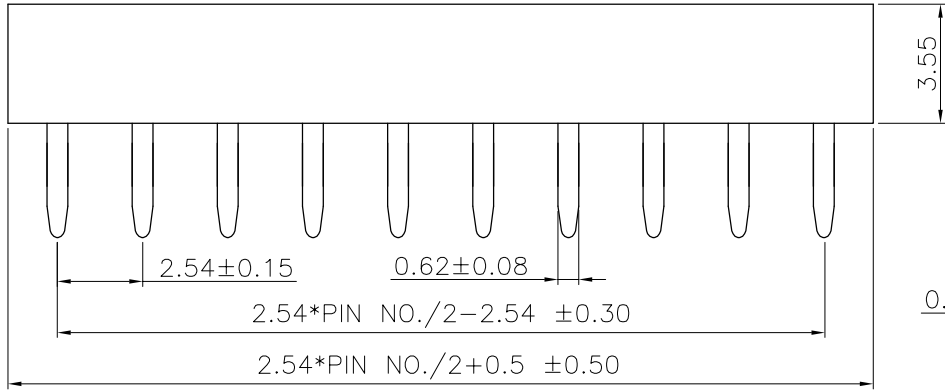


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

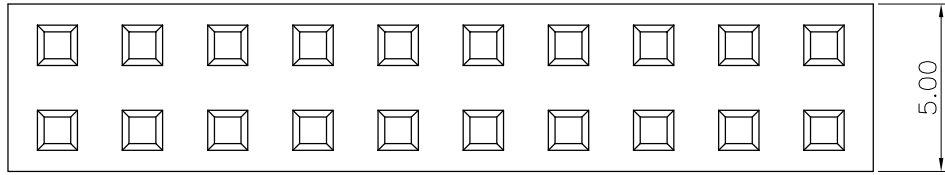

RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ±0.05

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: UL94V-0
 1-2.CONTACTS: BRASS
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 GOLD FLASH/TIN OVER NICKEL
 3.ELECTRICAL PERFORMANCE:
 3-1.CURRENT RATING: 3A
 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 3-3.INSULATION RESISTANCE: 1000MΩ Min
 3-4.DIELECTRIC WITHSTANDING : 500V
 4.ENVIRONMENTAL PERFORMANCE:
 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
 5.PACKAGE SPEC:TRAY
 6.P/N:

FH2541 36 F 0-2 XX 1 X X X 04
 SERIES NO: | HOUSING: 1-PA9T
 HEIGHT: | 36: 3.55mm | COLOR: A-BLACK
 MALE FEMALE: | F-FEMALE | PLATING: A-ALL AU G/F
 ANGLE: | 0-180° | TERMPOINT: 1-DIP
 ROW NO: | 2-DOUBLE ROW
 PIN Q'PY: | 04~80

REV.	REVISION RECORD	DATE	UNITED STATES OF AMERICA	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1	Wang_jr	21.10.15	FH254136F0-2XX1XXX04	ENDE05		
			UNIT: mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE:		REV: A0	SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15	2.54双排排母H3.55W5.0 180度			