
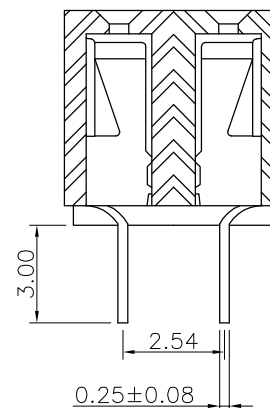
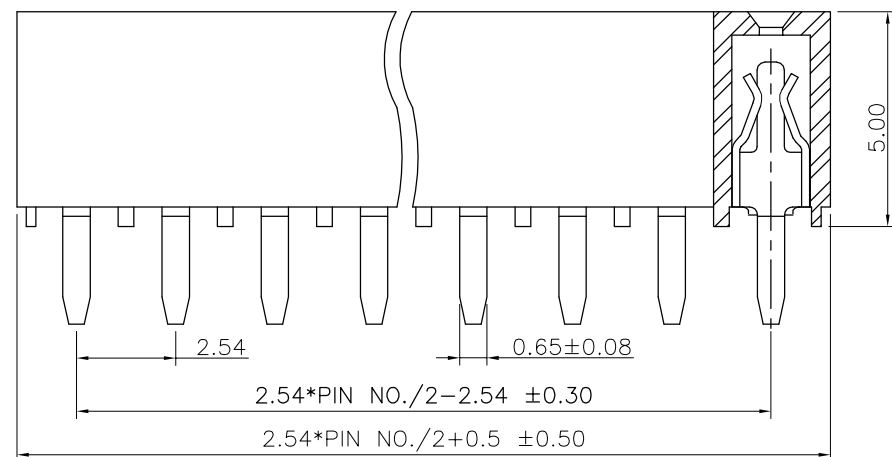


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS

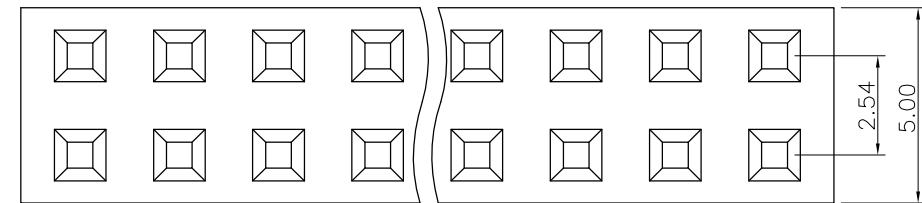

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: THERMOPLASTIC HIGH TEMP,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A AC/DC
 - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: TUBE
- 6.P/N:

SERIES NO: FH2541 50 F 0-2 XX 1 X X X 03
 HEIGHT: 50: 5.0mm
 MALE FEMALE: F-FEMALE
 ANGLE: 0-180'
 ROW NO: 2-DOUBLE ROW
 PIN Q'PY: 04~80
 HOUSING: 1-PA6T
 COLOR: A-BLACK
 PLATING: A-ALL AU G/F
 TERMIPOINT: 1-DIP

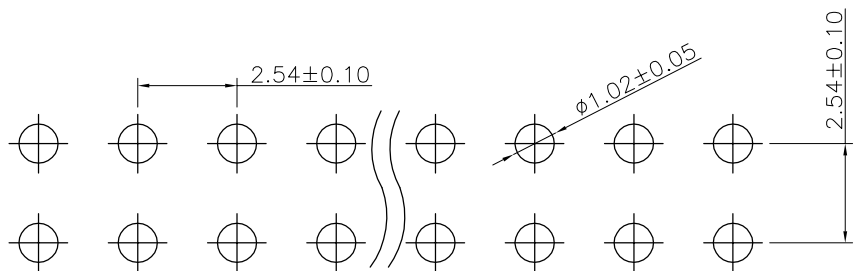

Recommended PCB layout

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:
AO	NEW RELEASE	22.10.28		LINEAR	1:1	Wang_jr	22.10.28	FH254150F0-2XX1XXX03	ENDE05
				ANGLES					
				0.0±0.35		Han_Gao	22.10.28	TITLE:	
				X'REF±6'					
			UNIT:mm	0.00±0.25		LanXuan_Hou	22.10.28	Pitch 2.54mm 180° 双排 DIP U型排母 塑高5.0	REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'				

WanLian Technology Co., Ltd

REV: A0 SHEET: 1/1