
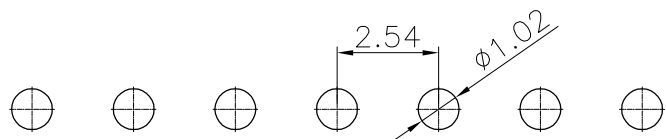
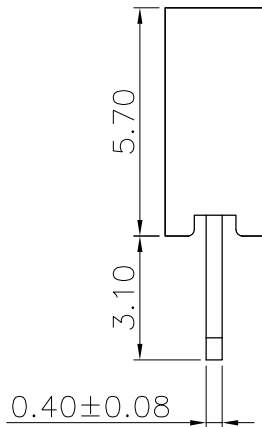
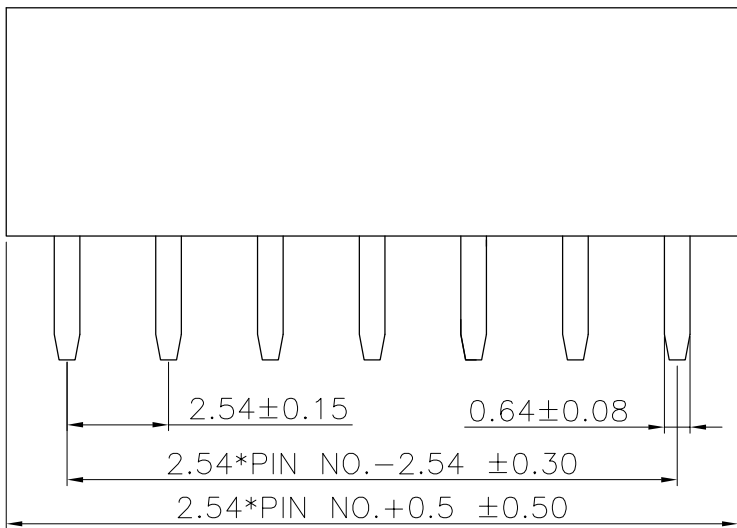


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements



RECOMMENDED P. C. B LAYOUT  
P. C. B TOLERANCE: ±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:  
1-1.HOUSING: PA6T,UL94V-0  
1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:  
2-1.CONTACTS:  
GOLD FLASH/TIN OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:  
3-1.CURRENT RATING: 3A  
3-2.CONTACT RESISTANCE: 30 mΩ MAX  
3-3.INSULATION RESISTANCE: 1000MΩ Min  
3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:  
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: TRAY
- 6.P/N:

FH2541 57 F 0-1 XX 1 X X X 01

SERIES NO: \_\_\_\_\_ HOUSING:  
1-PA6T  
2-PA6T+HF

HEIGHT: \_\_\_\_\_ 57: 5.7mm COLOR:  
A-BLACK

MALE FEMALE: \_\_\_\_\_ PLATING:  
A-ALL AU G/F

ANGLE: \_\_\_\_\_ 0-180°

ROW NO: \_\_\_\_\_ 1-SINGLE ROW

PIN Q'PY: \_\_\_\_\_ TERMIPOINT:  
01~40 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15	FH254157F0-1XX1XXX01	ENDE05	
			UNIT: mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE:		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15	2.54单 Y型排母 H5.7 W2.5 180度 PC3.1 系列		