
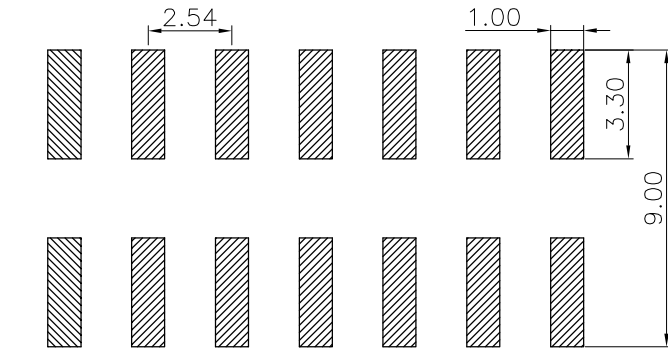
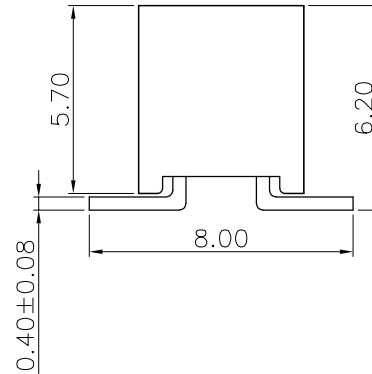
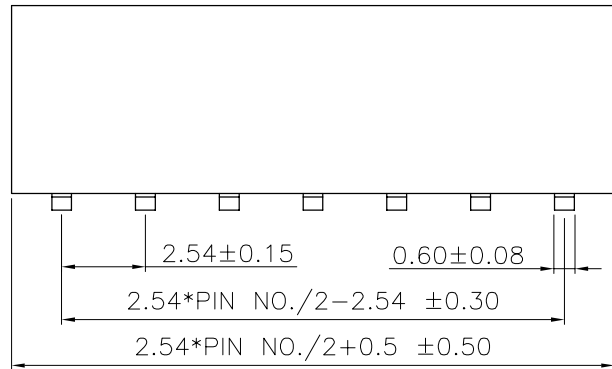


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

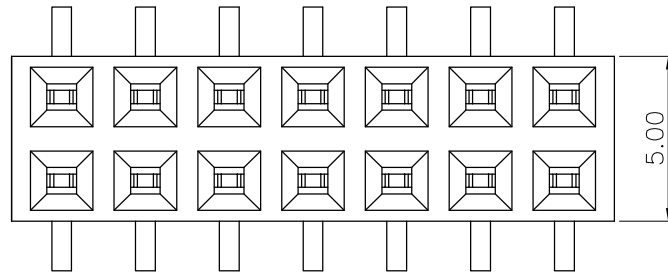

RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA6T,UL94V-0
1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH/TIN OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: REEL
- 6.P/N:

FH2541 57 F 0-2 XX 2 X X X 02

SERIES NO: _____ HOUSING:
1-PA6T


HEIGHT: _____ COLOR:
57: 5.7mm A-BLACK

MALE FEMALE: _____ PLATING:
F-FEMALE A-ALL AU G/F

ANGLE: _____ PLATING:
0-180° A-ALL AU G/F

ROW NO: _____ TERMPOINT:
2-DOUBLE ROW 2-SMT

PIN Q'PY: _____ TERMPOINT:
04~80 2-SMT

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.15	FH254157F0-2XX2XXX02	ENDE05	
			0.00±0.25	X'±3°	DESIGNER	Gao_Han	22.10.15	TITLE: Pitch 2.54mm 180° 双排 SMT Y 型排母 H5.7 W5.0 PC:8.0			REV: A0 SHEET: 1/1
			0.00±0.10	X'X' ±2°	DRAWN	LX_HOU	22.10.15				