
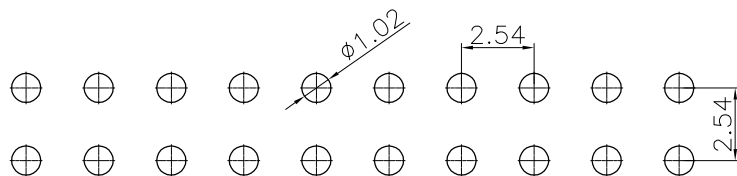
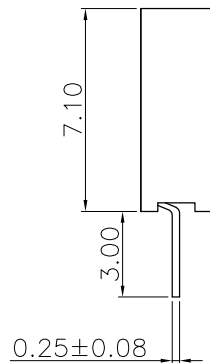
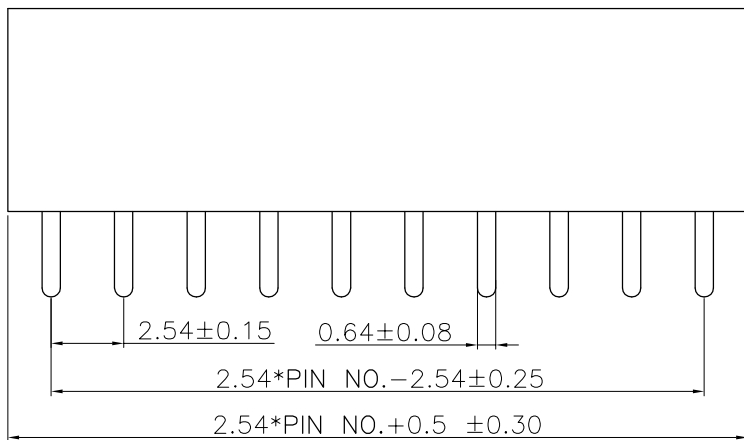


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS



RECOMMENDED P. C. B LAYOUT  
P. C. B TOLERANCE: ±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: PA6T,UL94V-0
  - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
  - 2-1.CONTACTS: TIN/GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
  - 3-1.CURRENT RATING: 3A
  - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
  - 3-3.INSULATION RESISTANCE: 1000MΩ Min
  - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
  - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: TRAY
- 6.P/N:

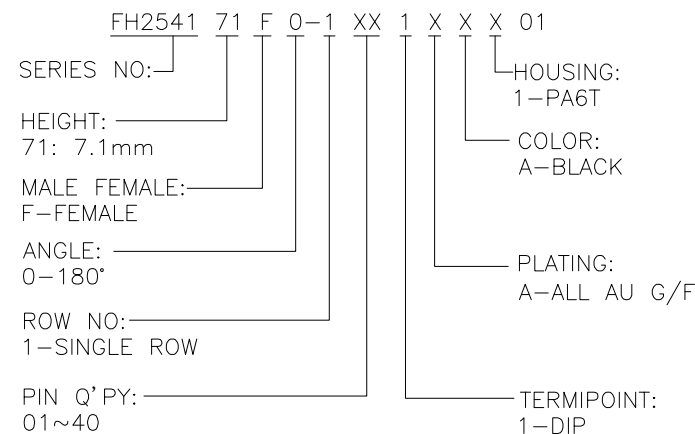

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH254171FO-1XX1XXX01	DWG.NO: ENDE05	
AO	NEW RELEASE	22.04.07		LINEAR	ANGLES	APPROVED	Wang_jr	22.04.07			
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	22.04.07	TITLE: Pitch 2.54mm 180° 单排 DIP U型排母 H7.1 W5.0 PC:3.0		
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	22.04.07	REV: A0	SHEET: 1/1	