
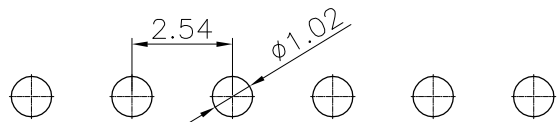
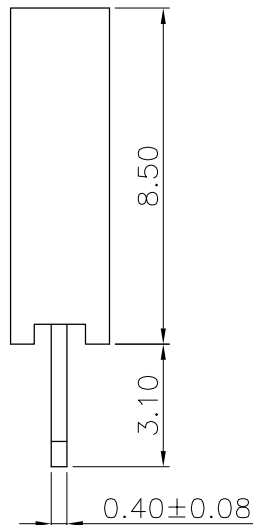
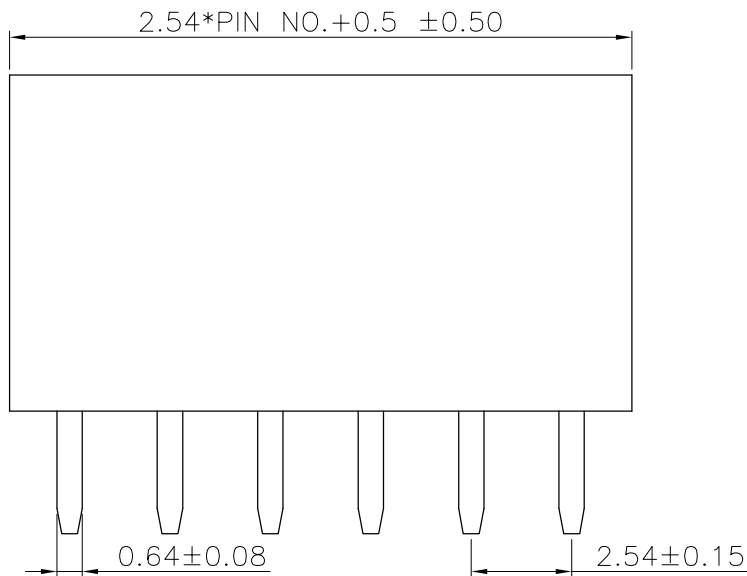


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

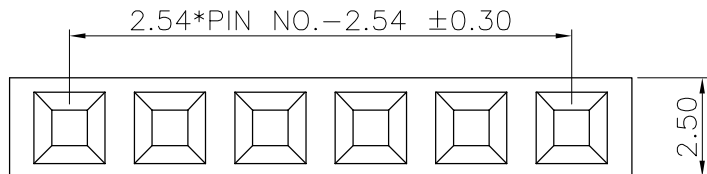

Recommended PCB Layout
TOLERANCE:±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA6T,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH/TIN OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A
 - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC:TRAY

6.P/N:

FH2541 85 F 0-1 XX 1 X X X 01

SERIES NO: _____

HEIGHT: _____
85: 8.5mm

MALE FEMALE: _____
F-FEMALE

ANGLE: _____
0-180°

ROW NO: _____
1-SINGLE ROW

PIN Q' PY: _____
01~40

HOUSING:
1-PA6T
2-PA6T+HF

COLOR:
A-BLACK

PLATING:
A-ALL AU G/F

TERMIPOINT:
1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH254185F0-1XX1XXX01	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15			
			0.0±0.35	X'REF±6°	DESIGNER	Gao_Han	21.10.15	TITLE: 2.54单 Y型排母 H8.5W2.5 180度 PC3.1 系列			
			UNIT:mm	X'±3°	DRAWN	Gao_Han	21.10.15				
			SIZE: A4	0.000±0.10	X'X' ±2°				REV: A0	SHEET: 1/1	