
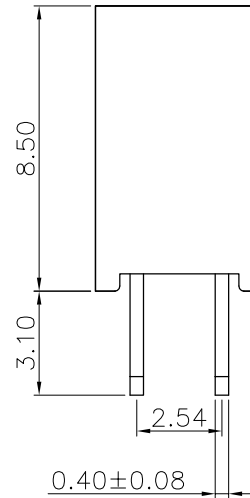
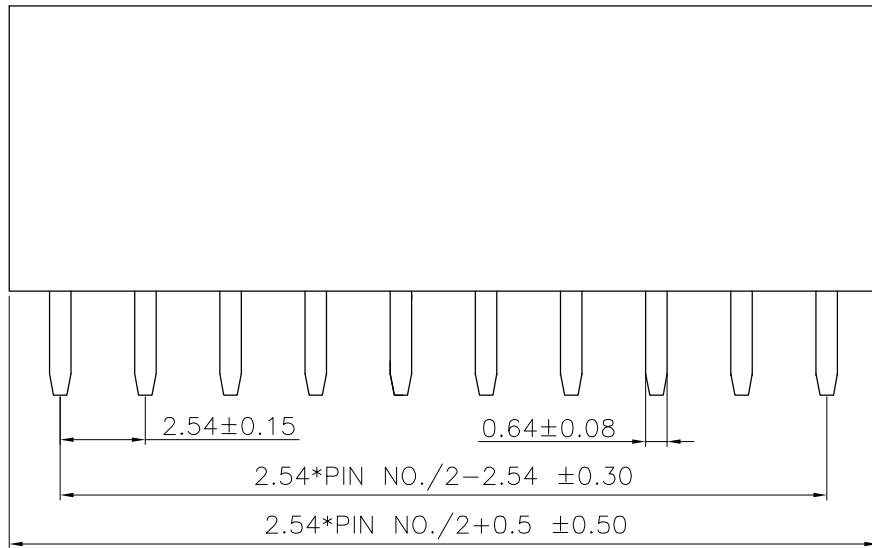


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS

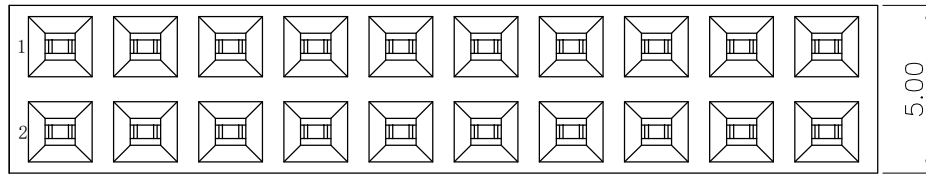

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA6T,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH/TIN OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A
 - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: TRAY
- 6.P/N:

SERIES NO: FH2541 85 F 0-2 XX 1 X X X 01
 HEIGHT: 85: 8.5mm
 MALE FEMALE: F-FEMALE
 ANGLE: 0-180°
 ROW NO: 2-DOUBLE ROW
 PIN Q'PY: 02~80
 HOUSING: 1-PA6T 2-PA6T+HF
 COLOR: A-BLACK
 PLATING: A-ALL AU G/F
 TERMIPOINT: 1-DIP

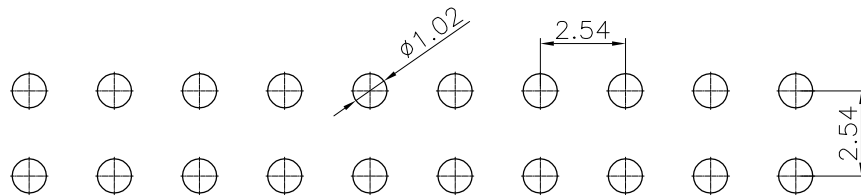

RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.10.15		LINEAR 0.0±0.35 UNIT:mm SIZE: A4	ANGLES X°REF±6° X'±3° X''±2°	1:1	APPROVED	Wang_jr	21.10.15	FH254185F0-2XX1XXX01	
						DESIGNER	Gao_Han	21.10.15	TITLE:		REV: A0
						DRAWN	Gao_Han	21.10.15	2.54双排母H8.5W5.0 180度 PC3.1 系列		SHEET: 1/1