

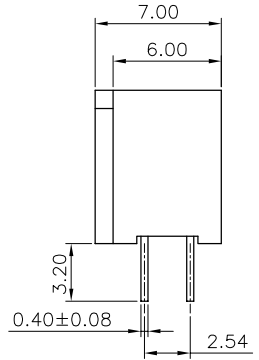
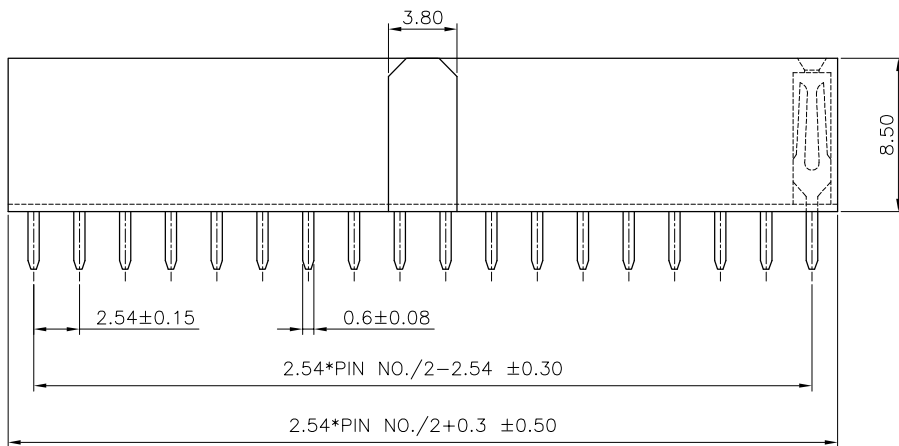


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

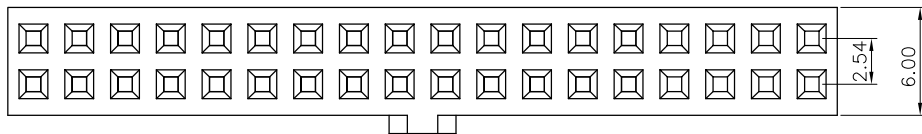

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PA9T/PBT,UL94V-0
 1-2.CONTACTS: BRASS
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 TIN/GOLD FLASH PLATED OVER ALL.
 3.ELECTRICAL PERFORMANCE:
 3-1.CURRENT RATING: 3A AC/DC
 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 3-3.INSULATION RESISTANCE: 1000MΩ Min
 3-4.DIELECTRIC WITHSTANDING : 500V
 4.ENVIRONMENTAL PERFORMANCE:
 4-1.OPERATING TEMPERATURE:
 PA9T:-40°C~+105°C.
 PBT :-25°C~+85°C.
 5.PACKAGE SPEC: TRAY
 6.Ordering Information:
 FH2541 85 F 0-2 XX 1 X X X 03
 SERIES NO: _____ HOUSING:
 1-PA9T
 2-PBT
 HEIGHT: _____ COLOR:
 85: 8.5mm A-BLACK
 MALE FEMALE: _____ PLATING:
 F-FEMALE A-ALL AU G/F
 ANGLE: _____ TERMPOINT:
 0-180° 1-DIP
 ROW NO: _____
 2-DOUBLE ROW
 PIN Q'PY: _____
 02~40

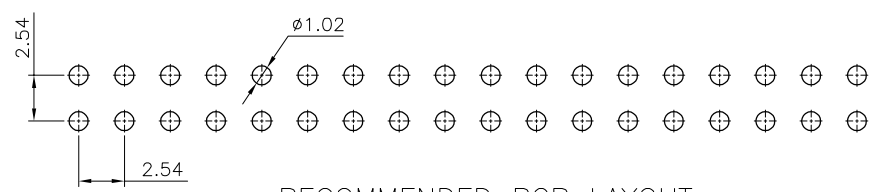

RECOMMENDED PCB LAYOUT
 (GENERAL TOLERANCE: ±0.05)

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH254185F0-2XX1XXX03	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED	Wang_jr	21.11.17				
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	21.11.17	TITLE: Pitch 2.54mm 180 双排 DIP Y型排母 H8.5W6.0 PC 3.2带凸	REV: A0		SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Zijun_Huang	21.11.17				