




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

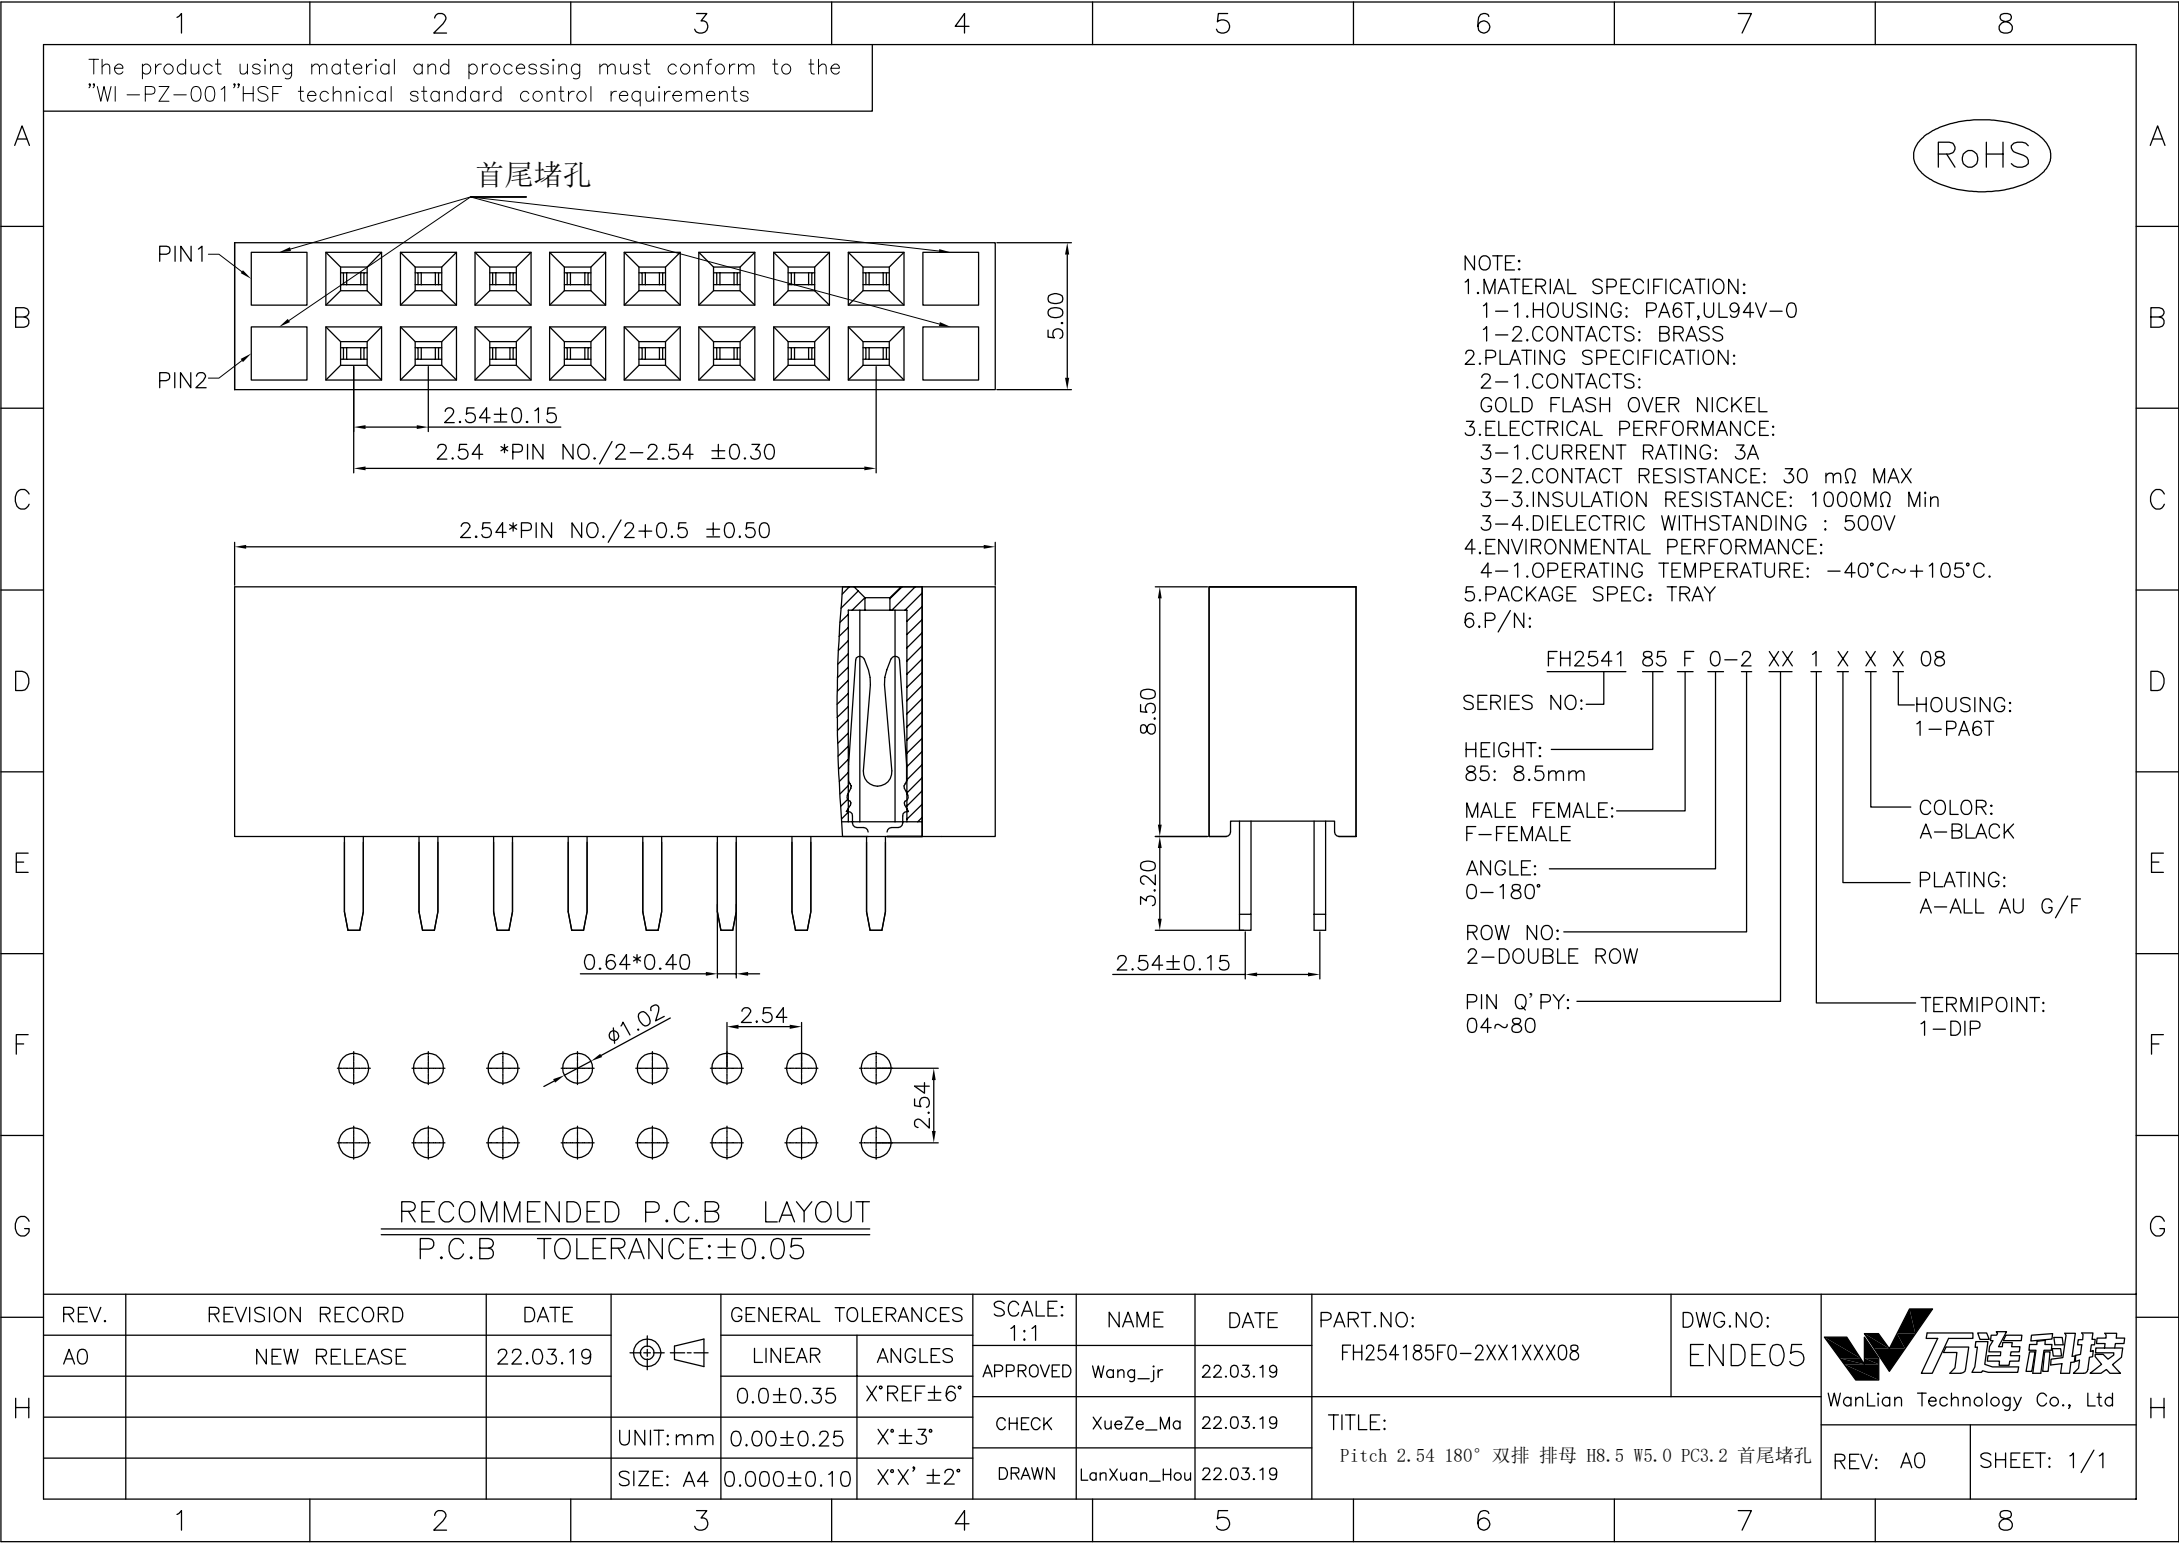

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: PA6T,UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 500V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: TRAY
6.P/N:
FH2541 85 F 0-2 XX 1 X X X 08
SERIES NO: 1-PA6T
HEIGHT: 85: 8.5mm
MALE FEMALE: F-FEMALE
ANGLE: 0-180°
ROW NO: 2-DOUBLE ROW
PIN Q'PY: 04~80
TERMPOINT: 1-DIP
COLOR: A-BLACK
PLATING: A-ALL AU G/F

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE:±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
AO	NEW RELEASE	22.03.19		LINEAR	ANGLES	APPROVED	Wang_jr	22.03.19	FH254185F0-2XX1XXX08	ENDE05		
			UNIT:mm	0.0±0.35	X'REF±6°	CHECK	XueZe_Ma	22.03.19	TITLE: Pitch 2.54 180° 双排 排母 H8.5 W5.0 PC3.2 首尾堵孔		REV: A0	SHEET: 1/1
				0.00±0.25	X'±3°	DRAWN	LanXuan_Hou	22.03.19				
			SIZE: A4	0.000±0.10	X'X' ±2°							