
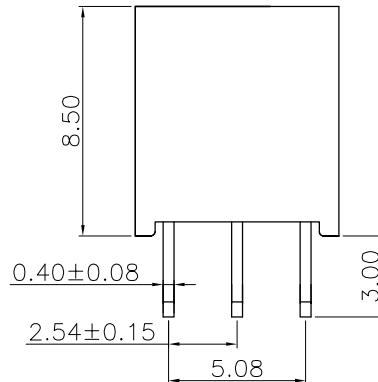
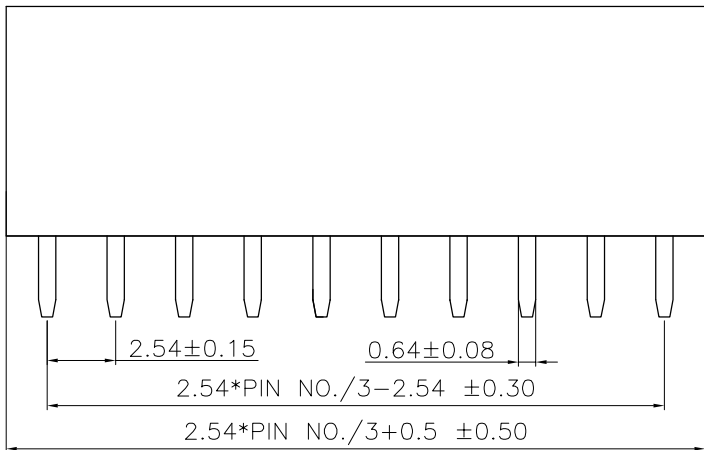



The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

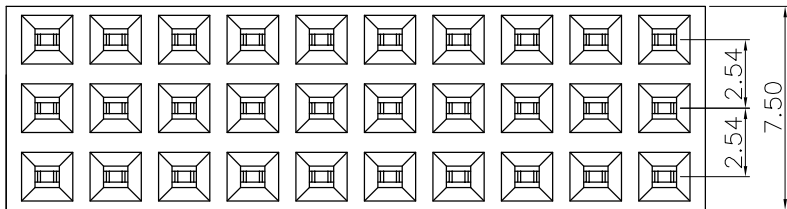

- NOTE:
- MATERIAL SPECIFICATION:
 - HOUSING: PA6T,UL94V-0
 - CONTACTS: BRASS
 - PLATING SPECIFICATION:
 - CONTACTS: GOLD FLASH OVER NICKEL
 - ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 3A
 - CONTACT RESISTANCE: 30 mΩ MAX
 - INSULATION RESISTANCE: 1000MΩ Min
 - DIELECTRIC WITHSTANDING : 500V
 - ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+105°C.
 - PACKAGE SPEC: PE BAG
 - P/N:

SERIES NO: FH2541 85 F 0-3 XX 1 X X X 01
 HEIGHT: 85: 8.5mm
 MALE FEMALE: F-FEMALE
 ANGLE: 0-180°
 ROW NO: 3-THREE ROWS
 PIN Q'PY: XX PIN
 HOUSING: 1-PA6T
 COLOR: A-BLACK
 PLATING: A-ALL AU G/F
 TERMIPOINT: 1-DIP

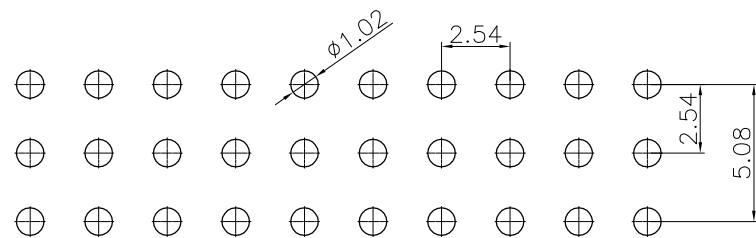

RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ±0.05

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	21.11.17		LINEAR	ANGLES	1:1	Wang_jr	21.11.17	FH254185F0-3XX1XXX01	ENDE05	
			0.00±0.25	X'±3'	DESIGNER	Han_Gao	21.11.17	TITLE:		REV: A0	SHEET: 1/1
			0.00±0.10	X'X' ±2'	DRAWN	LX_HOU	21.11.17	Pitch 2.54mm 180° 三排 DIP H8.5W7.5单塑排母 PC3.0			