
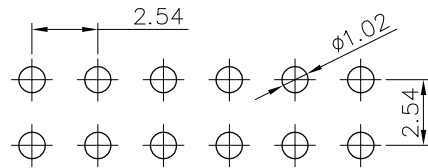
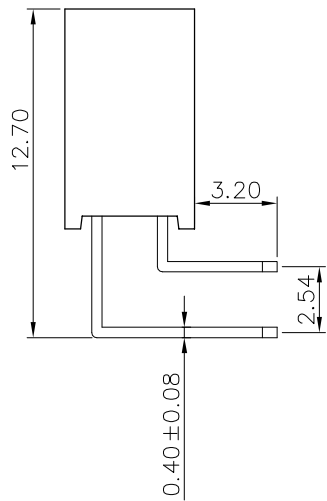
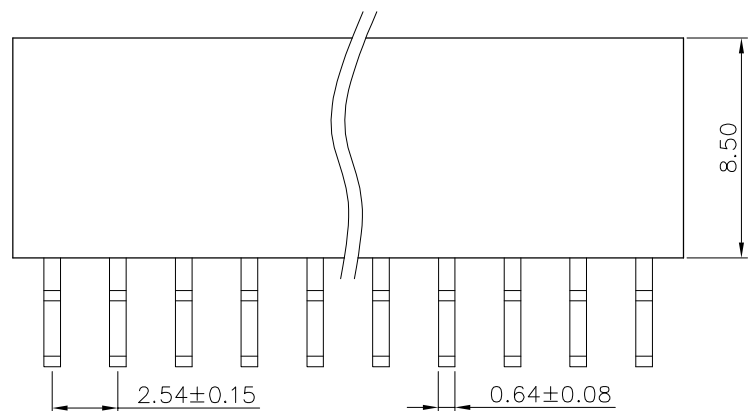


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

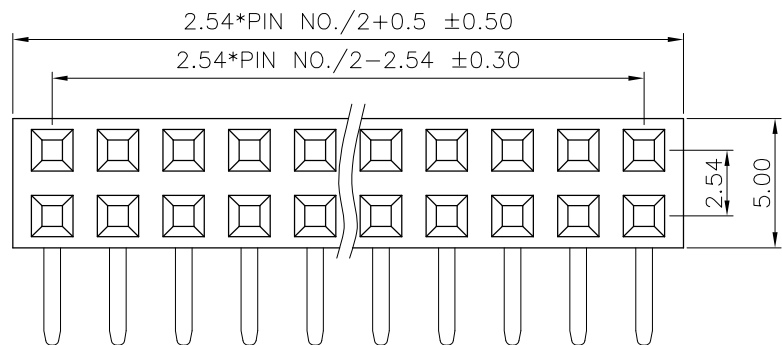

RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE: ±0.05)

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PA6T,UL94V-0
 1-2.CONTACTS: BRASS
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 TIN/GOLD FLASH PLATED OVER ALL
 3.ELECTRICAL PERFORMANCE:
 3-1.CURRENT RATING: 3A
 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 3-3.INSULATION RESISTANCE: 1000MΩ Min
 3-4.DIELECTRIC WITHSTANDING : 500V
 4.ENVIRONMENTAL PERFORMANCE:
 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
 5.PACKAGE SPEC: TRAY
 6.P/N:

FH2541 85 F 9-2 XX 1 X X X 05
 SERIES NO: _____ HOUSING: 1-PA6T
 HEIGHT: 85: 8.5mm COLOR: A-BLACK
 MALE FEMALE: F-FEMALE PLATING: A-ALL AU G/F
 ANGLE: 9-90° TERMPOINT: 1-DIP
 ROW NO: 2-DOUBLE ROW
 PIN Q' PY: 04~80

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: FH254185F9-2XX1XXX05	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.15			
			UNIT:mm	X'±3'	DESIGNER	Gao_Han	22.10.15	TITLE: Pitch 2.54mm 90° 双排 DIP Y型排母 H8.5 W5.0 PC:3.2	REV: A0	SHEET: 1/1	
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	LX_HOU		22.10.15		