
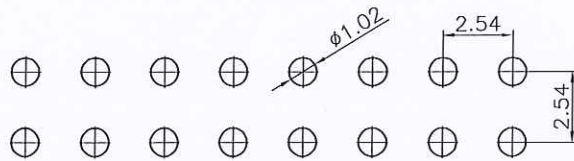
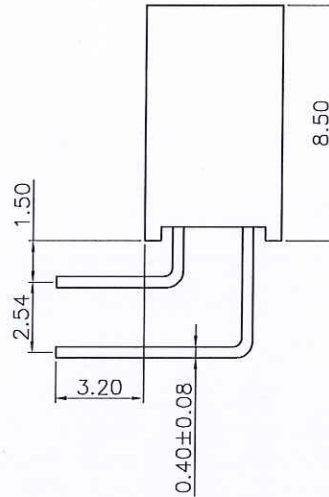
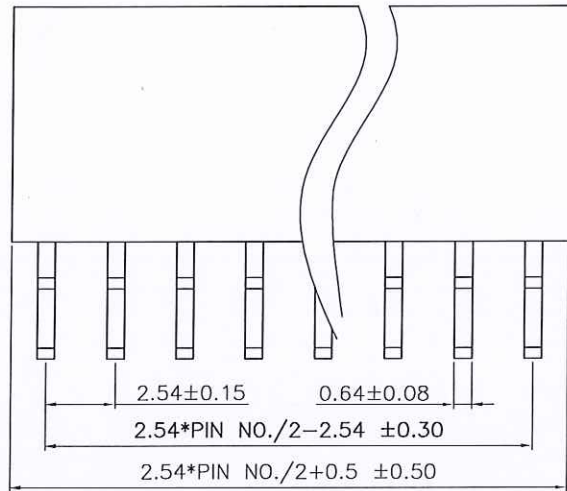


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

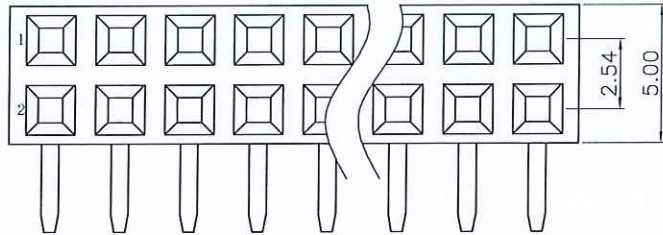

RECOMMENDED P. C. B LAYOUT  
P. C. B TOLERANCE: ±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: PA6T,UL94V-0
  - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
  - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
  - 3-1.CURRENT RATING: 3A
  - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
  - 3-3.INSULATION RESISTANCE: 1000MΩ Min
  - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
  - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: TRAY
- 6.P/N:

FH2541 85 F 9-2 XX 1 X X X 06

SERIES NO: \_\_\_\_\_ HOUSING: 1-PA6T

HEIGHT: \_\_\_\_\_ 85: 8.5mm

MALE FEMALE: \_\_\_\_\_ COLOR: A-BLACK

F-FEMALE

ANGLE: \_\_\_\_\_ PLATING: A-ALL AU G/F

9-90°

ROW NO: \_\_\_\_\_

2-DOUBLE ROW

PIN Q'PY: \_\_\_\_\_ TERMIPOINT: 1-DIP

04~80

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART NO:	DWG.NO:		
A0	NEW RELEASE		LINEAR	ANGLES	APPROVED			FH254185F9-2XX1XXX06	ENDE05		
			0.0±0.35	X'REF±6°	DESIGNER			TITLE:		REV: A0	SHEET: 1/1
			UNIT:mm	0.00±0.25	X'±3'	DRAWN		2.54双排母H8.5W5.0 90度 PC3.2			
			SIZE: A4	0.000±0.10	X'X' ±2'						