
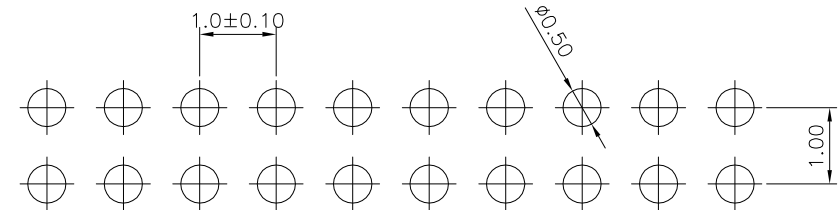
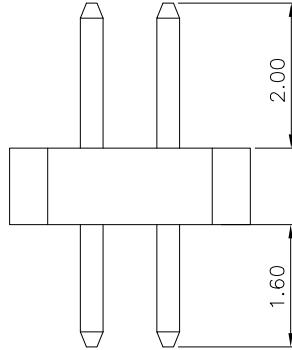
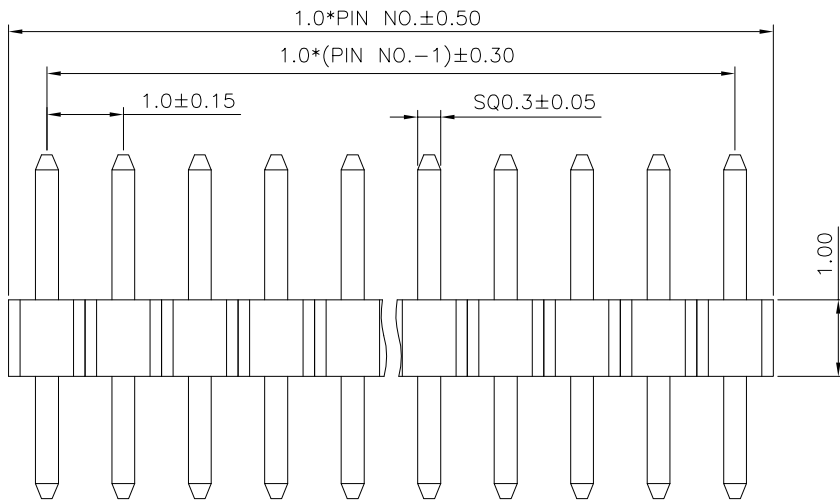


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

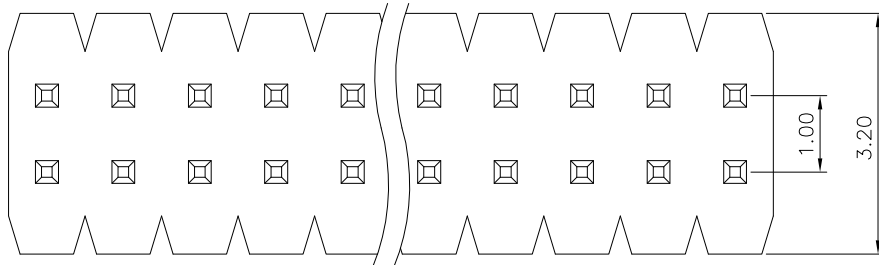

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA9T,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 0.2KGF/pin min
 - 3-2.DURABILITY: 100 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING: 1A AC/DC
 - 4-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 4-3.INSULATION RESISTANCE: 1000MΩ Min
 - 4-4.DIELECTRIC WITHSTANDING : 300V
- 5.ENVIRONMENTAL PERFORMANCE:
 - 5-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 6.PACKAGE SPEC: PE BAG
- 7.P/N:

PH1007 10 M 0-2 XX 1 X X X 01

SERIES NO: PH1007 10 M 0-2 XX 1 X X X 01

HEIGHT: 10: 1.0mm

MALE FEMALE: M-MALE

ANGLE: 0-180°

ROW NO: 2-DOUBLE ROW

PIN Q' PY: 02~80

HOUSING: 1-PA9T

COLOR: A-BLACK K-WHITE S-NATURE

PLATING: A-ALL AU G/F C-BRIGHT TIN D-MATTE Tin

TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	PH100710M0-2XX1XXX01	ENDE05	
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Han_Gao	22.05.09	TITLE:		REV: A0 SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	LanXuan_Hou	22.05.09	Pitch 1.00mm 180° 双排 DIP排针 塑高 1.0mm PC1.6		