
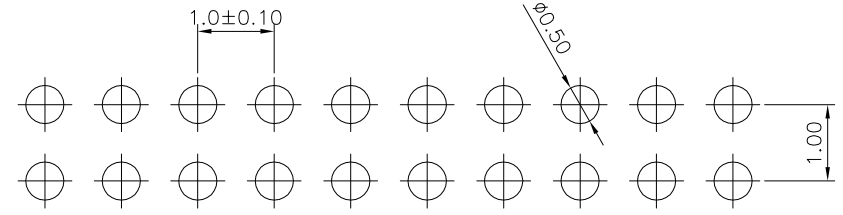
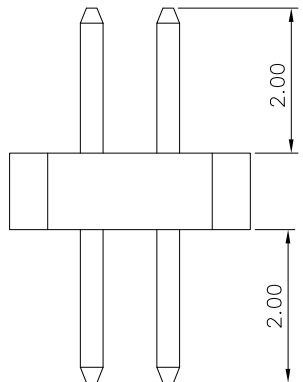
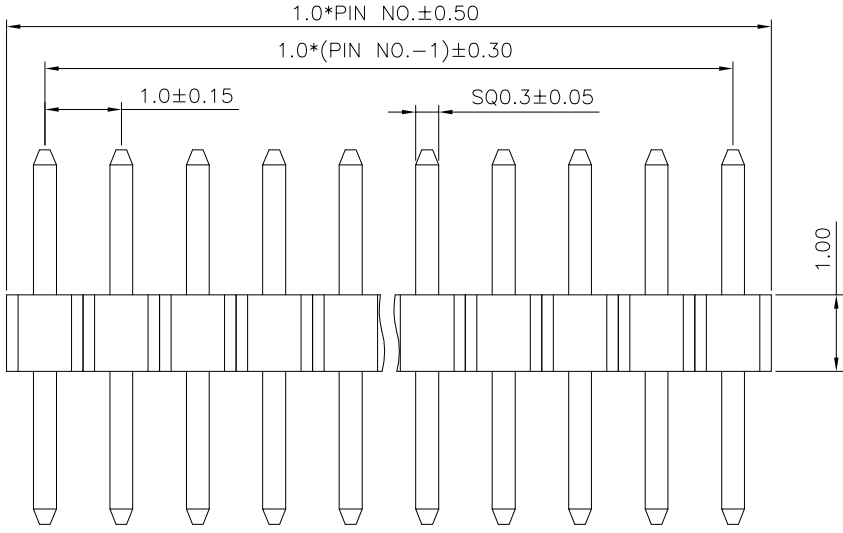


The product using material and processing must conform to the "WL-PZ-001"HSF technical standard control requirements

RoHS

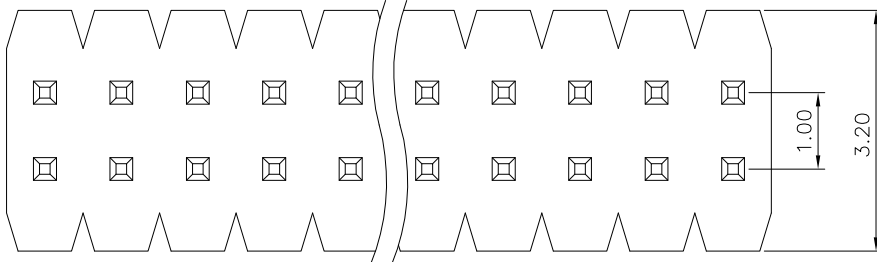

NOTE:
 1.MATERIAL SPECIFICATION:
 1-1.HOUSING: PA9T,UL94V-0
 1-2.CONTACTS: BRASS
 2.PLATING SPECIFICATION:
 2-1.CONTACTS:
 TIN/GOLD FLASH PLATED OVER ALL.
 3.MECHANICAL PERFORMANCE:
 3-1.RETENTIVITY FORCE: 0.2KGF/pin min
 3-2.DURABILITY: 100 CYCLES.
 4.ELECTRICAL PERFORMANCE:
 4-1.CURRENT RATING: 1A AC/DC
 RATED VOLTAGE : 300V AC/DC
 4-2.CONTACT RESISTANCE: 20 mΩ MAX
 4-3.INSULATION RESISTANCE: 1000MΩ Min
 4-4.DIELECTRIC WITHSTANDING : 300V
 5.ENVIRONMENTAL PERFORMANCE:
 5-1.OPERATING TEMPERATURE: -40°C~+105°C.
 6.PACKAGE SPEC: PE BAG
 7.P/N:
 PH1007 10 M 0-2 XX 1 X X X 03
 SERIES NO: | HOUSING: 1-PA9T
 HEIGHT: | 10: 1.0mm | COLOR: A-BLACK, K-WHITE, S-NATURE
 MALE FEMALE: | M-MALE | PLATING: A-ALL AU G/F, C-BRIGHT TIN, D-MATTE Tin
 ANGLE: | 0-180° | ROW NO: 2-DOUBLE ROW
 PIN Q' PY: | 02~80 | TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	PH100710M0-2XX1XXX03	ENDE05		
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Han_Gao	22.05.09	TITLE:		REV: A0	SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	LanXuan_Hou	22.05.09	Pitch 1.00mm 180° 双排 DIP排针 塑高 1.0mm PC2.0			