
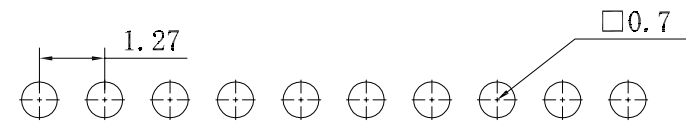

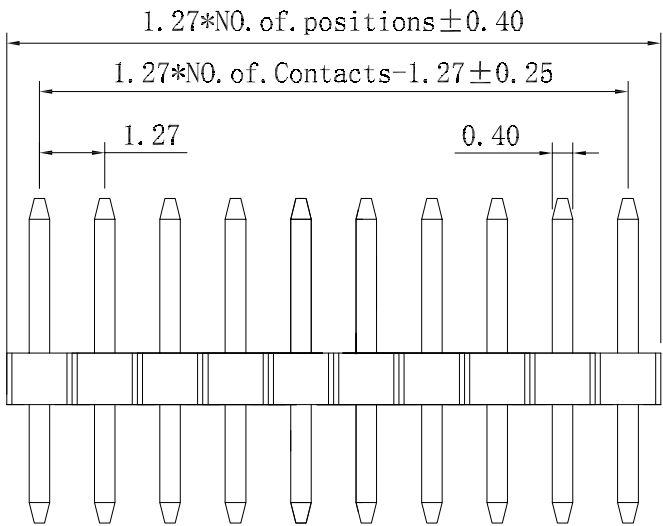


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements



RECOMMENDED P. C. B LAYOUT

P. C. B TOLERANCE: ±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: UL94V-0
 - 1-2.CONTACTS: BRASS
 - 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
 - 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 0.2kgf/pin min
 - 3-2.DURABILITY: 100 CYCLES.
 - 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING: 1A
 - RATED VOLTAGE : 300V AC/DC
 - 4-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 4-3.INSULATION RESISTANCE: 1000MΩ Min
 - 4-4.DIELECTRIC WITHSTANDING : 300V
 - 5.ENVIRONMENTAL PERFORMANCE:
 - 5-1.OPERATING TEMPERATURE: -40°C~+105°C.
 - 6.P/N:
 - PH1276 10 M 0-1 XX 1 X X X 01
- SERIES NO: _____ HOUSING: 1-PA6T HF
- HEIGHT: _____ COLOR: A-BLACK
- 10: 1.0mm
- MALE FEMALE: _____ PLATING: A-ALL AU G/F
- M-MALE
- ANGLE: _____ 0-180°
- ROW NO: _____ 1-SINGLE ROW
- PIN Q' PY: _____ TERMIPOINT: 1-DIP
- 02~40

REV.	REVISION RECORD	DATE	UNIT: mm	GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		
AO	NEW RELEASE	21.10.12		SIZE: A4	LINEAR	ANGLES	APPROVED	Wang_jr	21.10.12	PH127610M0-1XX1XXX01		ENDE05
				0.0±0.35	X'REF±6°	DESIGNER	Han_Gao	21.10.12	TITLE:		REV: AO	SHEET: 1/1
				0.00±0.25	X'±3°	DRAWN	Zijun_Huang	21.10.12	1.27单排针H1.0W2.0 1xNP 180度 L=6.3			
				0.000±0.10	X'X' ±2'							