
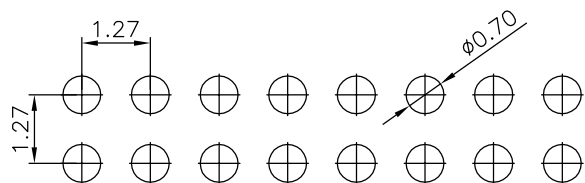
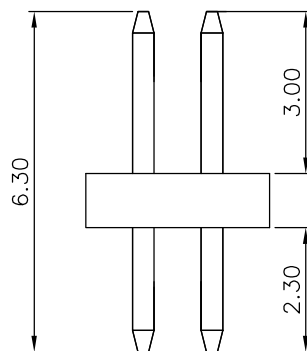
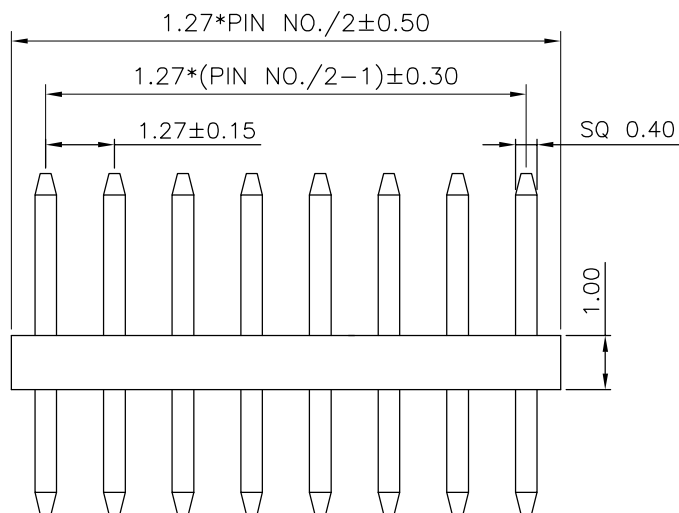


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

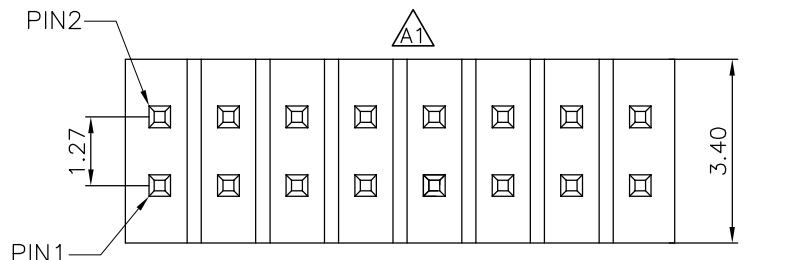

RECOMMENDED P. C. B LAYOUT

P. C. B TOLERANCE: ± 0.05

NOTE:

1. MATERIAL SPECIFICATION:
 - 1-1. HOUSING: UL94V-0
 - 1-2. CONTACTS: BRASS
2. PLATING SPECIFICATION:
 - 2-1. CONTACTS: TIN/GOLD FLASH OVER NICKEL
3. ELECTRICAL PERFORMANCE:
 - 3-1. CURRENT RATING: 1A
 - RATED VOLTAGE : 300V AC/DC
 - 3-2. CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3. INSULATION RESISTANCE: 1000MΩ Min
 - 3-4. DIELECTRIC WITHSTANDING : 300V
4. ENVIRONMENTAL PERFORMANCE:
 - 4-1. OPERATING TEMPERATURE: -40°C~+105°C.
5. PACKAGE SPEC: PE BAG
6. P/N:

PH1276 10 M 0-2 XX 1 X X X 04

SERIES NO: _____ HOUSING: 1-PA6T

HEIGHT: _____ COLOR: A-BLACK

10: 1.0mm

MALE FEMALE: _____ PLATING: A-ALL AU G/F

M-MALE

ANGLE: _____

0-180°

ROW NO: _____

2-DOUBLE ROW

PIN Q'PY: _____ TERMIPOINT: 1-DIP

04~80

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH127610M0-2XX1XXX04	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.11.17		LINEAR	ANGLES	APPROVED					
A1	MODIFY BY ENTITY	23.08.25	UNIT: mm	0.0±0.35	X'REF±6°	DESIGNER	TITLE: Pitch 1.27mm 180° 双排 DIP 排针 塑高1.0 PA:3.0 PC:2.3			REV: A1	SHEET: 1/1
				0.00±0.25	X'±3°						
			SIZE: A4	0.000±0.10	X'X' ±2°						