
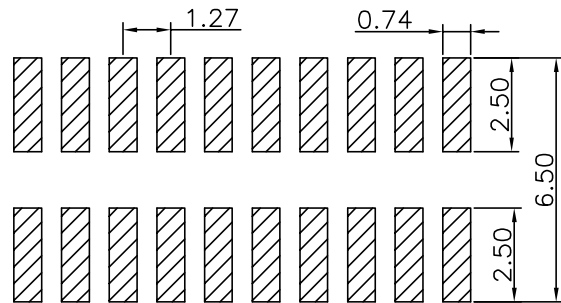

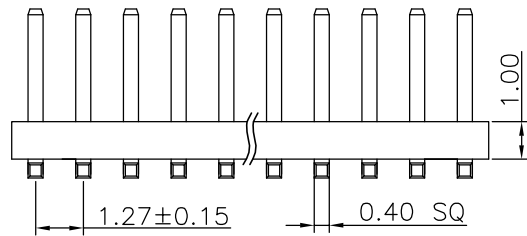


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

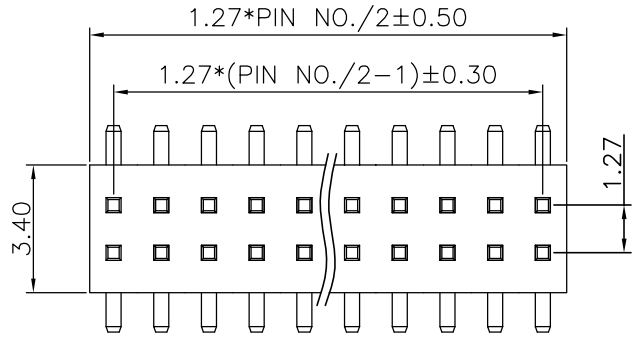

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: THERMOPLASTIC HIGH TEMP,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: TIN/GOLD FLASH PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE:
 - 3-1.RETENTIVITY FORCE: 0.2KGF/pin min
 - 3-2.DURABILITY: 100 CYCLES.
- 4.ELECTRICAL PERFORMANCE:
 - 4-1.CURRENT RATING: 1A AC/DC
RATED VOLTAGE : 300V AC/DC
 - 4-2.CONTACT RESISTANCE: 20 mΩ MAX
 - 4-3.INSULATION RESISTANCE: 1000MΩ Min
 - 4-4.DIELECTRIC WITHSTANDING : 300V
- 5.ENVIRONMENTAL PERFORMANCE:
 - 5-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 6.PACKAGE SPEC: REEL
- 7.P/N:

PH1276 10 M 0-2 XX 2 X X X 08

SERIES NO: _____ HOUSING: 1-PA9T

HEIGHT: _____ 10: 1.0mm

MALE FEMALE: _____ COLOR: A-BLACK

M-MALE

ANGLE: _____ PLATING: A-ALL AU G/F

0-180~

ROW NO: _____

2-DOUBLE ROW

PIN Q'PY: _____ TERMIPOINT: 2-SMT

XXPIN

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	PH127610M0-2XX2XXX08	ENDE05	
			UNIT:mm	X'±3'	DESIGNER	Han_Gao	22.05.09	TITLE:		REV: A0 SHEET: 1/1	
			SIZE: A4	X'X' ±2'	DRAWN	LanXuan_Hou	22.05.09	1.27 Double-Row Pin header SMT TYP(H1.0)			