


The product using material and processing must conform to the "WL-PZ-001" HSF technical standard control requirements

RoHS

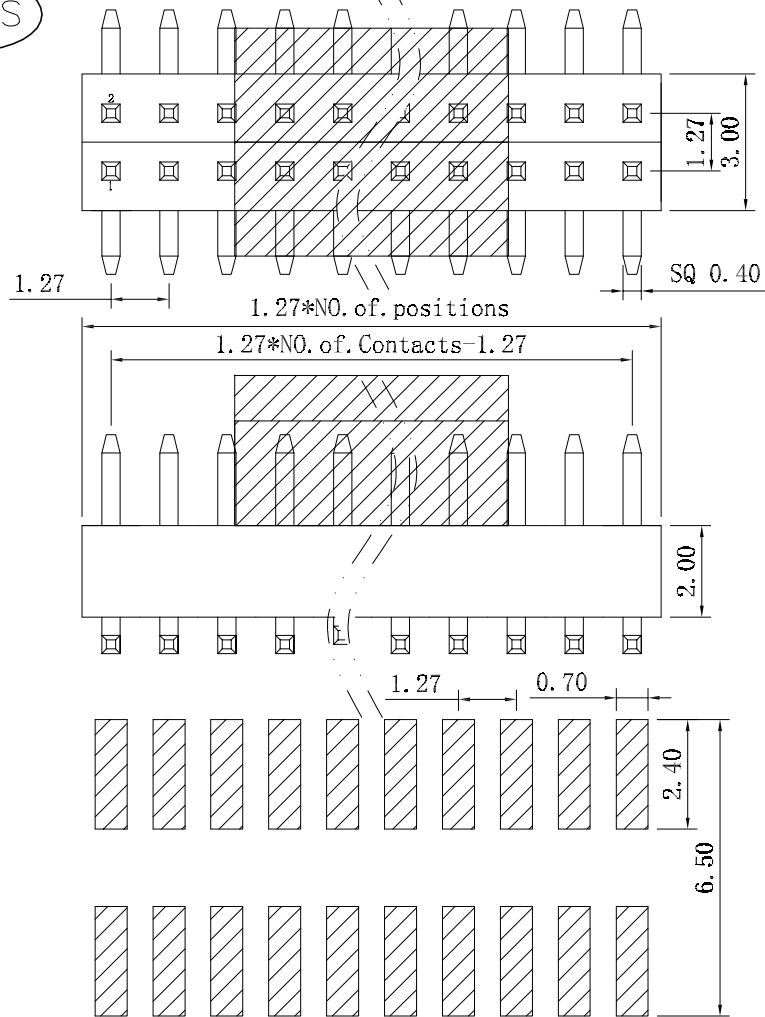

NOTE:

1. MATERIAL SPECIFICATION:
 - 1-1. HOUSING: UL94V-0
 - 1-2. CONTACTS: BRASS
2. PLATING SPECIFICATION:
 - 2-1. CONTACTS: GOLD FLASH OVER NICKEL
3. MECHANICAL PERFORMANCE:
 - 3-1. RETENTIVITY FORCE: 0.2kgf/PIN MIN
 - 3-2. DURABILITY: 100 CYCLES.
3. ELECTRICAL PERFORMANCE:
 - 3-1. CURRENT RATING: 1A
 - RATED VOLTAGE : 300V AC/DC
 - 3-2. CONTACT RESISTANCE: 20 mΩ MAX
 - 3-3. INSULATION RESISTANCE: 1000MΩ Min
 - 3-4. DIELECTRIC WITHSTANDING : 300V
4. ENVIRONMENTAL PERFORMANCE:
 - 4-1. OPERATING TEMPERATURE: -40°C~+105°C.
5. PACKAGE SPEC: REEL
6. P/N:

PH1276 20 M 0-2 XX 2 X X X 01

SERIES NO: PH1276
 HEIGHT: 20: 2.0mm
 MALE FEMALE: M-MALE
 ANGLE: 0-180°
 ROW NO: 2-DOUBLE ROW
 PIN Q' PY: 02~80

HOUSING: 1-PA6T
 COLOR: A-BLACK
 PLATING: A-ALL AU G/F
 1-G/F
 C-BRIGHT TIN
 TERMIPOINT: 2-SMT

RECOMMENDED P. C. B LAYOUT
 P. C. B TOLERANCE: ±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH127620M0-2XX2XXX01	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
AO	NEW RELEASE	22.10.28		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.28			
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Han_Gao	22.10.28	TITLE: 1.27双排排针H2.0 W3.0 SMT W5.8系列		
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	LanXuan_Hou	22.10.28			