
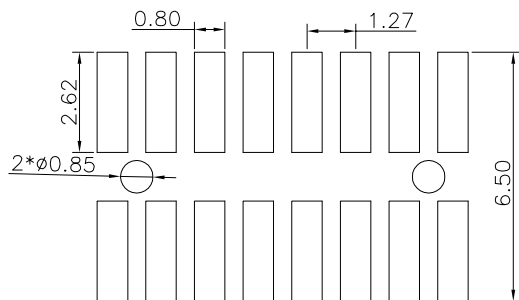

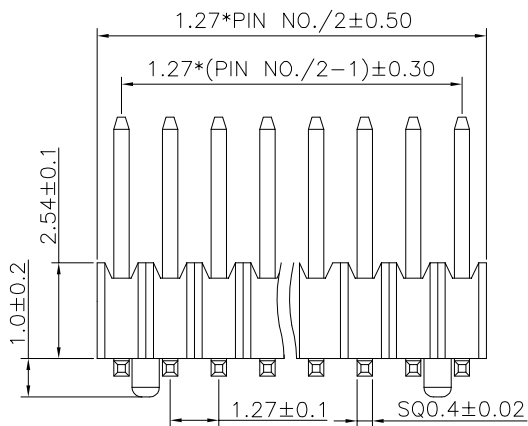


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

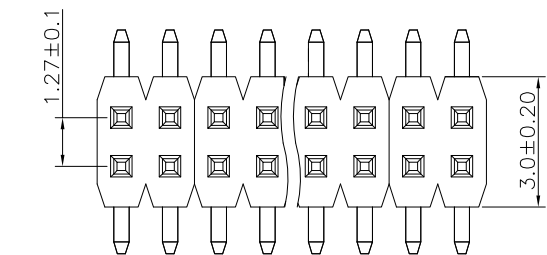

RECOMMEND P. C. B LAYOUT

PCB TOLERANCE: ±0.05 (TOP VIEW)

NOTE:

1.MATERIAL SPECIFICATION:  
1-1.HOUSING: THERMOPLASTIC HIGH TEMP,UL94V-0  
1-2.CONTACTS: BRASS

2.PLATING SPECIFICATION:

2-1.CONTACTS:  
TIN/GOLD FLASH PLATED OVER ALL.

3.MECHANICAL PERFORMANCE:

3-1.RETENTIVITY FORCE: 0.2KGF/pin min  
3-2.DURABILITY: 100 CYCLES.

4.ELECTRICAL PERFORMANCE:

4-1.CURRENT RATING: 1A AC/DC  
RATED VOLTAGE : 300V AC/DC  
4-2.CONTACT RESISTANCE: 20 mΩ MAX  
4-3.INSULATION RESISTANCE: 1000MΩ Min  
4-4.DIELECTRIC WITHSTANDING : 300V

5.ENVIRONMENTAL PERFORMANCE:

5-1.OPERATING TEMPERATURE: -40°C~+105°C.

6.PACKAGE SPEC: BOX

7.P/N:

PH1276 25 M 0-2 XX 2 X X X 04

SERIES NO:

HEIGHT:  
25: 2.54mm

MALE FEMALE:  
M-MALE

ANGLE:  
0-180°

ROW NO:  
2-DOUBLE ROW

PIN Q' PY:  
XXPIN

HOUSING:  
1-PA9T

COLOR:  
A-BLACK

PLATING:  
A-ALL AU G/F

TERMIPOINT:  
2-SMT

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
AO	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	PH127625M0-2XX2XXX04	ENDE05	
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Han_Gao	22.05.09	TITLE:		REV: A0    SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	LanXuan_Hou	22.05.09	Pitch 1.27mm 180° 双排排针 SMT H2.54 PA3.8		