
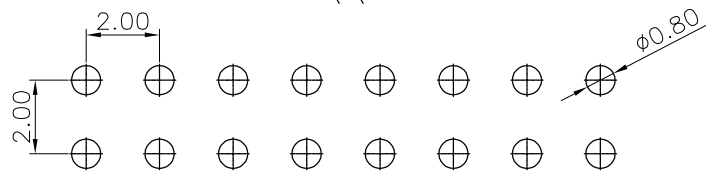
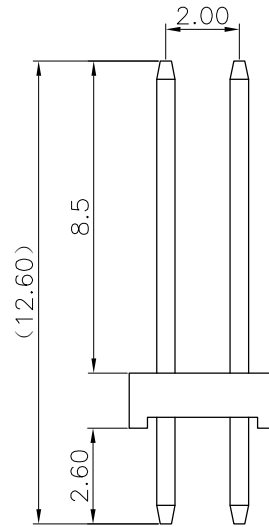
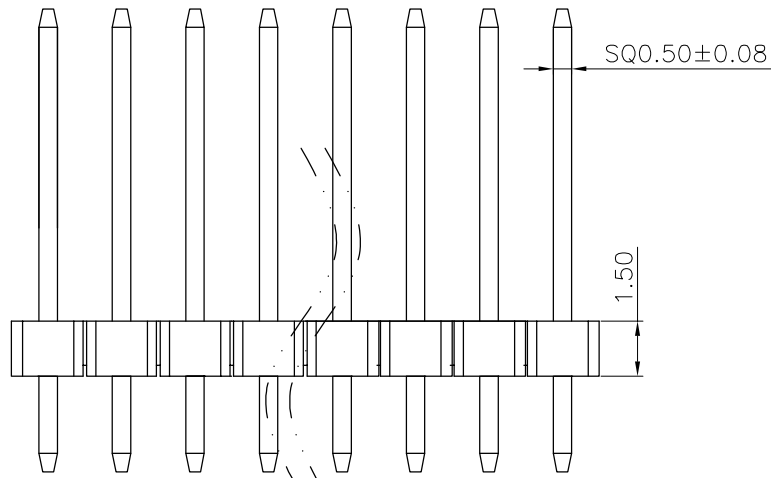


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

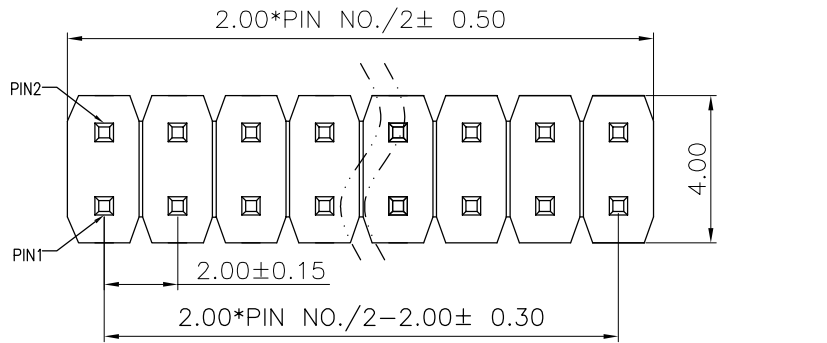

RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE: ±0.05)

NOTE:

1. MATERIAL SPECIFICATION:
 - 1-1. HOUSING: PA6T, UL94V-0
 - 1-2. CONTACTS: BRASS
2. PLATING SPECIFICATION:
 - 2-1. CONTACTS: GOLD FLASH OVER NICKEL
3. ELECTRICAL PERFORMANCE:
 - 3-1. CURRENT RATING: 2A
 - 3-2. CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3. INSULATION RESISTANCE: 1000MΩ Min
 - 3-4. DIELECTRIC WITHSTANDING: 300V
4. ENVIRONMENTAL PERFORMANCE:
 - 4-1. OPERATING TEMPERATURE: -40°C ~ +105°C.
5. PACKAGE SPEC: PE BAG
6. P/N:

PH2005 15 M 0-2 XX 1 X X X 01

SERIES NO: PH2005
 HEIGHT: 15: 1.5mm
 MALE FEMALE: M-MALE
 ANGLE: 0-180°
 ROW NO: 2-DOUBLE ROW
 PIN Q'PY: 02~80

HOUSING: 1-PA6T
 COLOR: A-BLACK
 PLATING: A-ALL AU G/F
 TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART NO: PH200515M0-2XX1XXX01	DWG NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09			
			UNIT:mm	X'±3°	DESIGNER	Han_Gao	22.05.09	TITLE: Pitch 2.00mm MX 180° 双排 DIP 单塑排针 L=12.6	REV: A0	SHEET: 1/1	
			SIZE: A4	X'X' ±2°	DRAWN	LanXuan_Hou	22.05.09				