
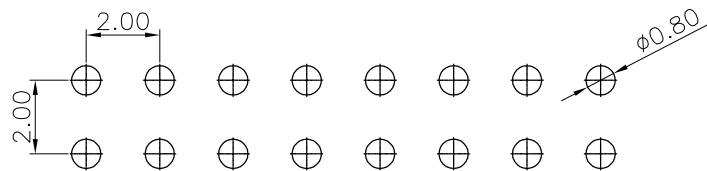
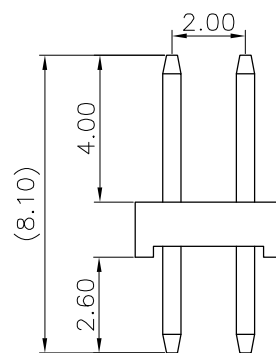
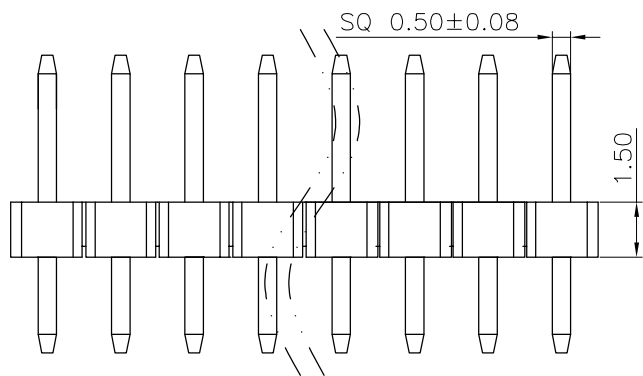


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

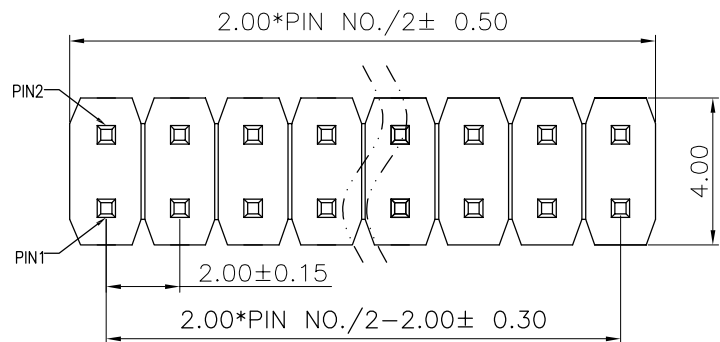

RECOMMENDED PCB LAYOUT
(GENERAL TOLERANCE: ±0.05)

NOTE:

1. MATERIAL SPECIFICATION:

1-1. HOUSING: PA6T, UL94V-0

1-2. CONTACTS: BRASS

2. PLATING SPECIFICATION:

2-1. CONTACTS:

GOLD FLASH OVER NICKEL

3. ELECTRICAL PERFORMANCE:

3-1. CURRENT RATING: 2A

3-2. CONTACT RESISTANCE: 30 mΩ MAX

3-3. INSULATION RESISTANCE: 1000MΩ Min

3-4. DIELECTRIC WITHSTANDING: 300V

4. ENVIRONMENTAL PERFORMANCE:

4-1. OPERATING TEMPERATURE: -40°C ~ +105°C

5. PACKAGE SPEC: PE BAG

6. P/N:

PH2005 15 M 0-2 XX 1 X X X 02

SERIES NO:

HEIGHT:

15: 1.5mm

MALE FEMALE:

M-MALE

ANGLE:

0-180°

ROW NO:

2-DOUBLE ROW

PIN Q'PY:

02~80

HOUSING:
1-PA6T

COLOR:
A-BLACK

PLATING:
A-ALL AU G/F
1-G/F
C-BRIGHT TIN

TERMIPOINT:
1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.05.09		LINEAR	ANGLES	APPROVED	Wang_jr	22.05.09	PH200515M0-2XX1XXX02	ENDE05	
			UNIT:mm	X'±3'	DESIGNER	Han_Gao	22.05.09	TITLE:		REV: A0	SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	LanXuan_Hou	22.05.09	Pitch 2.00mm 180° 双排 DIP 单塑排针 L=8.1		