
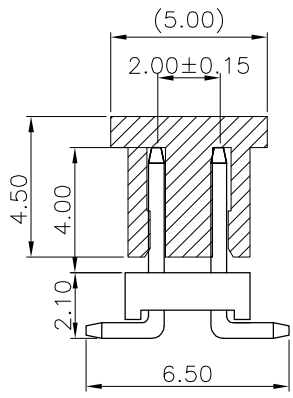
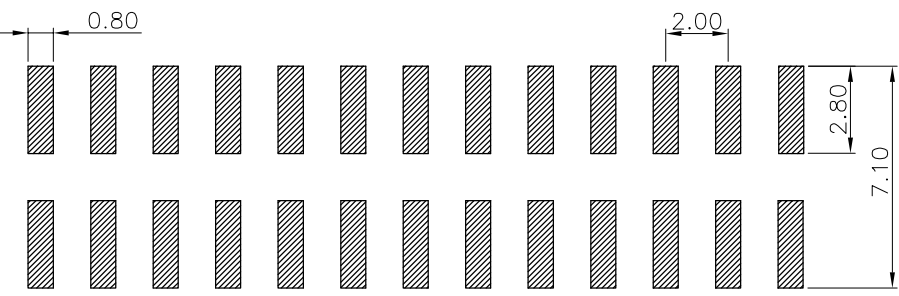
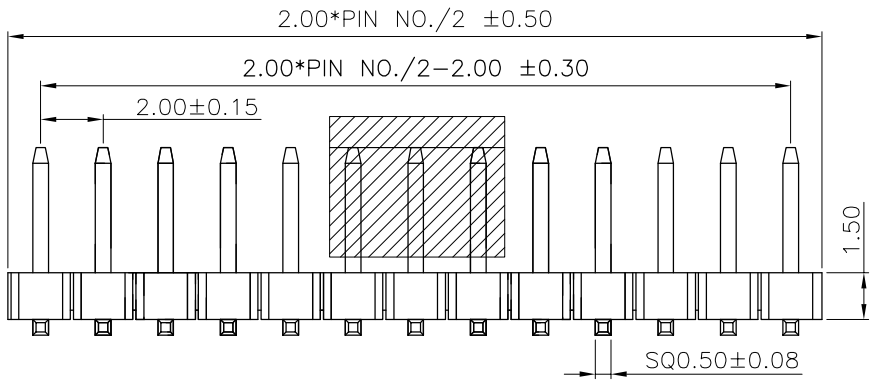


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

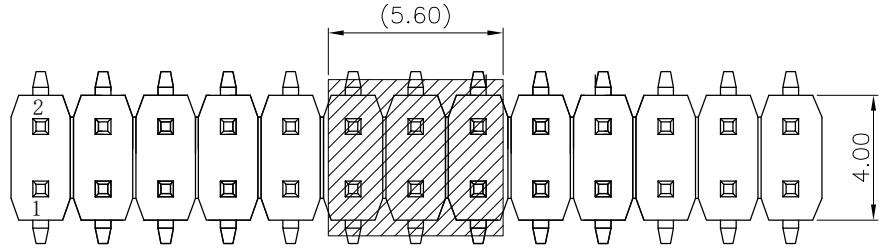

NOTE:
1.MATERIAL SPECIFICATION:
1-1.HOUSING: UL94V-0
1-2.CONTACTS: BRASS
2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH/TIN OVER NICKEL
3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 2A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 300V
4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
5.PACKAGE SPEC: REEL
6.P/N:

PH2005 15 M 0-2 XX 2 X X X 15

SERIES NO: _____
HEIGHT: _____
15: 1.5mm
MALE FEMALE: _____
M-MALE
ANGLE: _____
0-180°
ROW NO: _____
2-DOUBLE ROW
PIN Q'PY: _____
02~80

HOUSING:
1-PA6T
COLOR:
A-BLACK
PLATING:
A-ALL AU G/F
1-G/F
H-ALL AU 15U"
TERMIPOINT:
2-SMT

RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
AO	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1			PH200515M0-2XX2XXX15	ENDE05		
			UNIT:mm	0.0±0.35	X'REF±6°	APPROVED	Wang_jr	21.10.15	TITLE: Pitch 2.00mm 180° 双排排针H1.5W4.0 SMT+CAP PC6.5		REV: A0	SHEET: 1/1
				0.00±0.25	X'±3°	DESIGNER	Gao_Han	21.10.15				
				0.000±0.10	X'X'±2°	DRAWN	Gao_Han	21.10.15				