

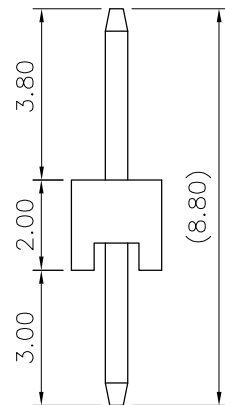
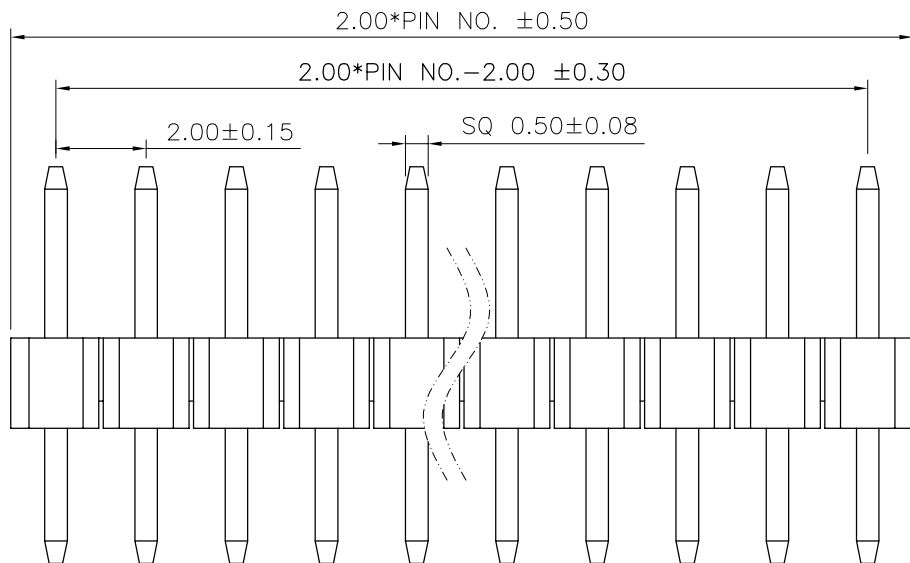


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

ROHS



NOTE:  
 1.MATERIAL SPECIFICATION:  
 1-1.HOUSING: PA6T,UL94V-0  
 1-2.CONTACTS: BRASS  
 2.PLATING SPECIFICATION:  
 2-1.CONTACTS:  
 GOLD FLASH OVER NICKEL  
 3.ELECTRICAL PERFORMANCE:  
 3-1.CURRENT RATING: 2A  
 3-2.CONTACT RESISTANCE: 30 mΩ MAX  
 3-3.INSULATION RESISTANCE: 1000MΩ Min  
 3-4.DIELECTRIC WITHSTANDING : 300V  
 4.ENVIRONMENTAL PERFORMANCE:  
 4-1.OPERATING TEMPERATURE: -40°C~+105°C.  
 5.PACKAGE SPEC: REEL  
 6.P/N:  
 PH2005 20 M 0-1 XX 1 X X X 01  
 SERIES NO: PH2005 20 M 0-1 XX 1 X X X 01  
 HEIGHT: 30: 3.0mm  
 MALE FEMALE: M=MALE  
 ANGLE: 0-180°  
 ROW NO: 1-SINGLE ROW  
 PIN Q' PY: 02~40  
 HOUSING: 1-PA6T  
 COLOR: A-BLACK  
 PLATING: A-ALL AU G/F  
 TERMIPOINT: 1-DIP

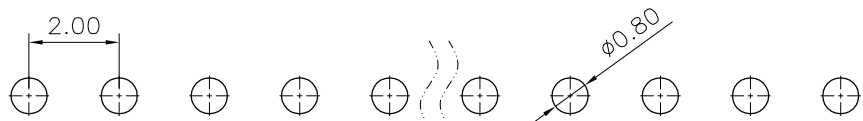

RECOMMENDED P. C. B LAYOUT

P. C. B TOLERANCE: ±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH200520M0-1XX1XXX01	DWG.NO: ENDE05	<p>WanLian Technology Co., Ltd</p>	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15				
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE: 2.0单排针H2.0W2.0 180度 L=8.8 系列	REV: A0		SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15				