
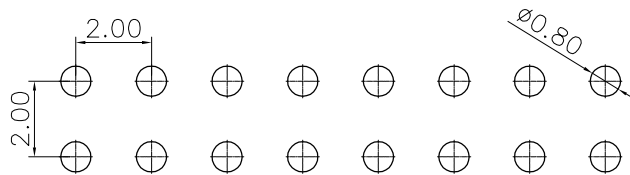
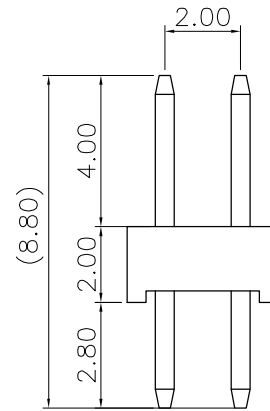
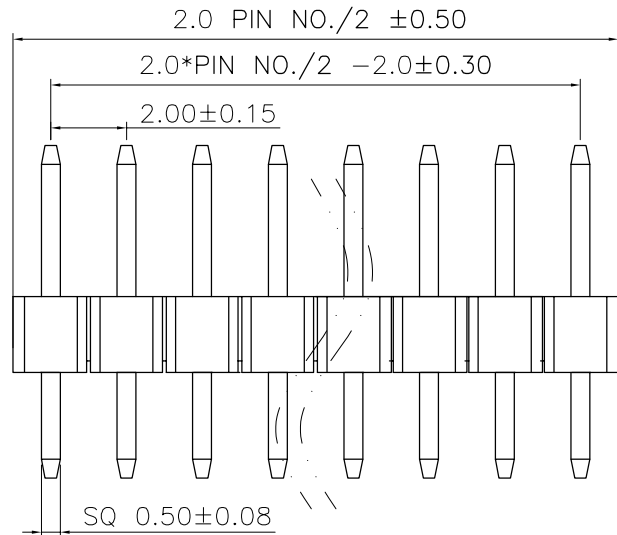


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

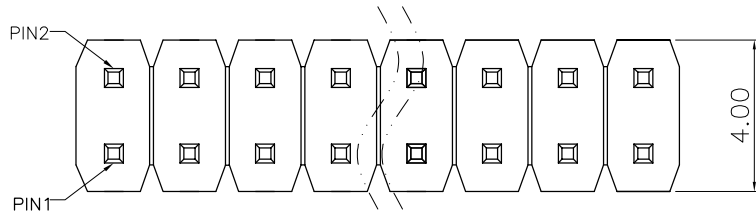

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE: ±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA6T,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH/TIN OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 2A
 - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 300V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.P/N:

PH2005 20 M 0-2 XX 1 X X X 01

SERIES NO: PH2005
 HEIGHT: 20: 2.0mm
 MALE FEMALE: M-MALE
 ANGLE: 0-180°
 ROW NO: 2-DOUBLE ROW
 PIN Q'PY: 02~80

HOUSING: 1-PA6T
 COLOR: A-BLACK
 PLATING: A-ALL AU G/F
 TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH200520M0-2XX1XXX01	DWG.NO: ENDE05	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15			
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Gao_Han	21.10.15	TITLE: Pitch 2.00mm 180° 双排 DIP 单塑排针 L=8.8		
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Gao_Han	21.10.15			
									REV: A0	SHEET: 1/1	