
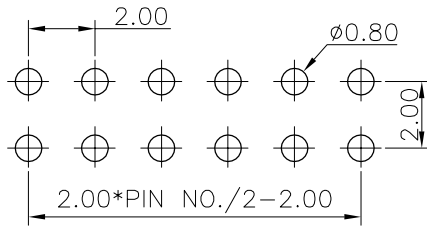
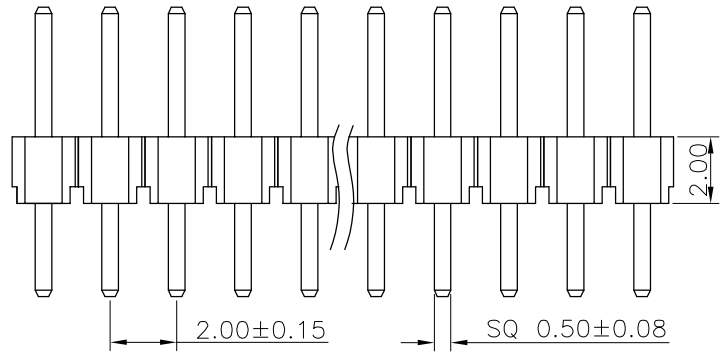


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


ROHS

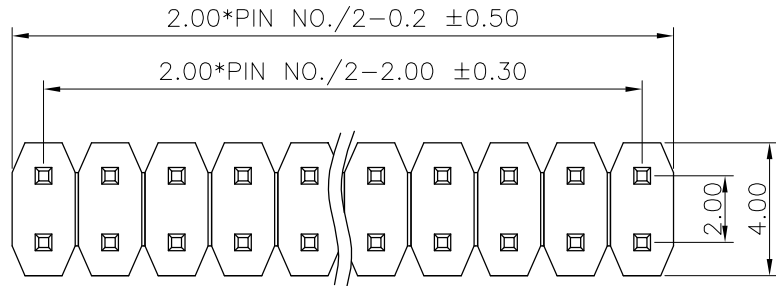

RECOMMEND P. C. B LAYOUT  
PCB TOLERANCE: ±0.05 (TOP VIEW)

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: UL94V-0
  - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
  - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
  - 3-1.CURRENT RATING: 2A
  - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
  - 3-3.INSULATION RESISTANCE: 1000MΩ Min
  - 3-4.DIELECTRIC WITHSTANDING : 300V
- 4.ENVIRONMENTAL PERFORMANCE:
  - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

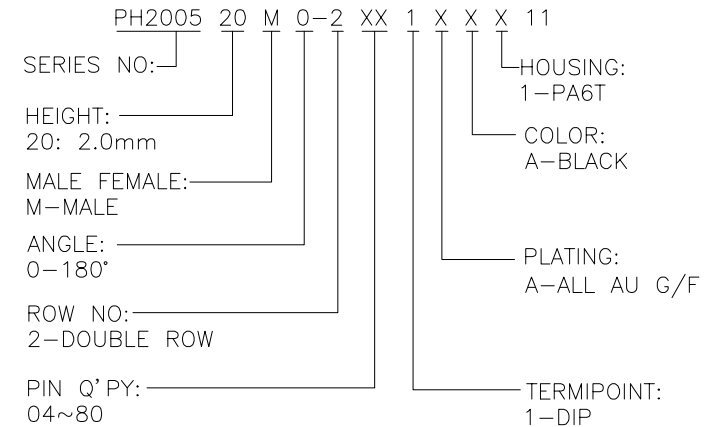

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
AO	NEW RELEASE	22.10.15		LINEAR	ANGLES	1:1	Wang_jr	22.10.15	PH200520M0-2XX1XXX11	ENDE05		
			UNIT:mm	X'REF±6'	APPROVED	Gao_Han	22.10.15	TITLE:			REV: A0	SHEET: 1/1
			SIZE: A4	X'X' ±2'	DESIGNER	LX_HOU	22.10.15	Pitch 2.00mm 180° 双排 DIP 排针 H2.0				