
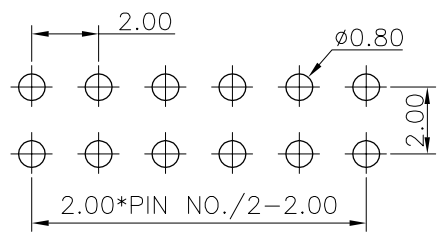

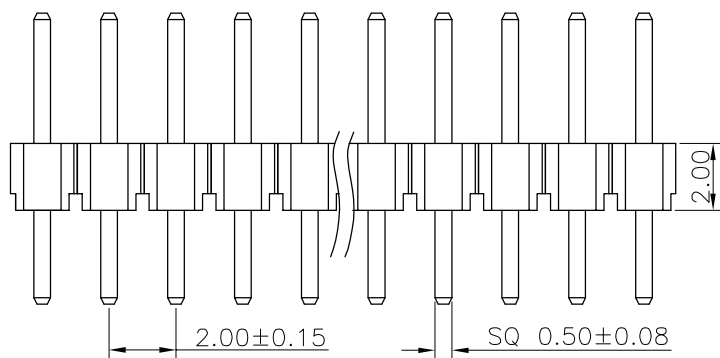


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

ROHS

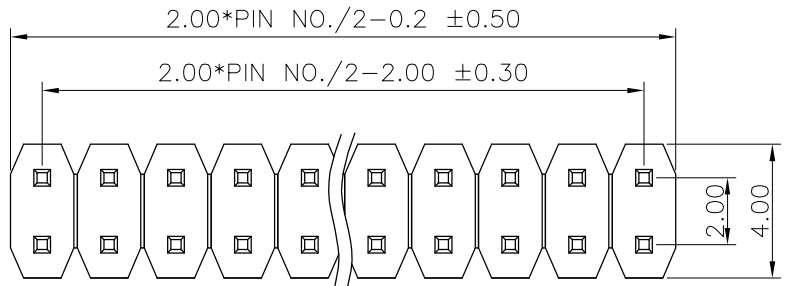

RECOMMEND P. C. B LAYOUT  
PCB TOLERANCE: ±0.05 (TOP VIEW)

NOTE:  
1.MATERIAL SPECIFICATION:  
1-1.HOUSING: UL94V-0  
1-2.CONTACTS: BRASS  
2.PLATING SPECIFICATION:  
2-1.CONTACTS:  
GOLD FLASH OVER NICKEL  
3.ELECTRICAL PERFORMANCE:  
3-1.CURRENT RATING: 2A  
3-2.CONTACT RESISTANCE: 30 mΩ MAX  
3-3.INSULATION RESISTANCE: 1000MΩ Min  
3-4.DIELECTRIC WITHSTANDING : 300V  
4.ENVIRONMENTAL PERFORMANCE:  
4-1.OPERATING TEMPERATURE: -40°C~+105°C.  
5.PACKAGE SPEC: PE BAG  
6.P/N:

PH2005 20 M 0-2 XX 1 X X X 14  
SERIES NO: PH2005  
HEIGHT: 20: 2.0mm  
MALE FEMALE: M-MALE  
ANGLE: 0-180°  
ROW NO: 2-DOUBLE ROW  
PIN Q' PY: 04~80  
HOUSING: 1-PA9T  
COLOR: A-BLACK  
PLATING: A-ALL AU G/F  
TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH200520M0-2XX1XXX14	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.15			
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Gao_Han	22.10.15	TITLE:	Pitch 2.00mm 180° 双排 DIP 排针 H2.0	
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	LX_HOU	22.10.15	REV: A0		