
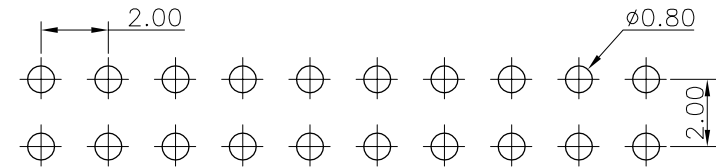
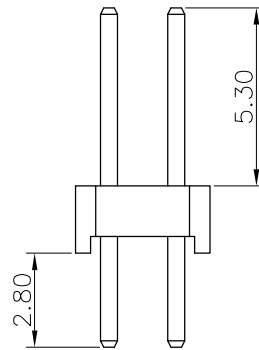
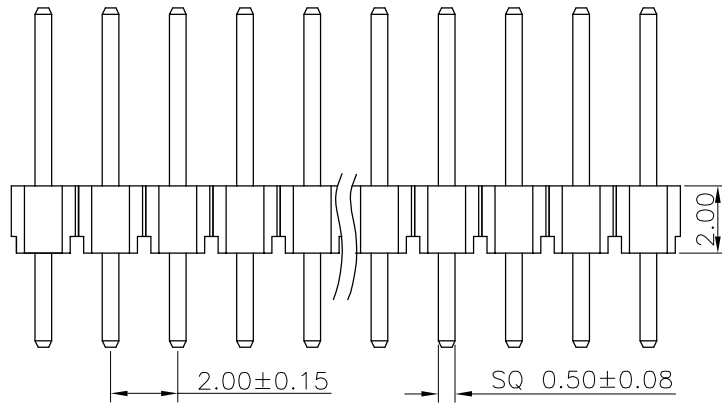


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

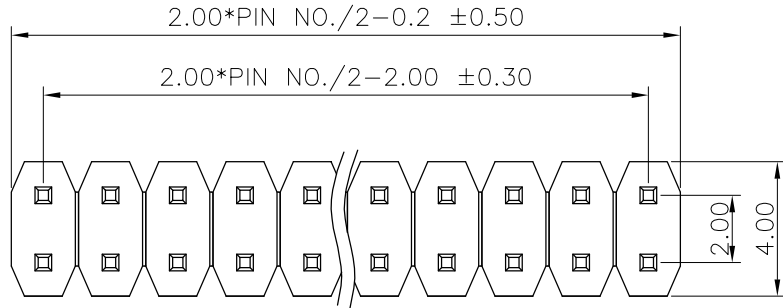

RECOMMEND P. C. B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

NOTE:

1. MATERIAL SPECIFICATION:
 - 1-1. HOUSING: UL94V-0
 - 1-2. CONTACTS: BRASS
2. PLATING SPECIFICATION:
 - 2-1. CONTACTS: GOLD FLASH OVER NICKEL
3. ELECTRICAL PERFORMANCE:
 - 3-1. CURRENT RATING: 2A
 - 3-2. CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3. INSULATION RESISTANCE: 1000MΩ Min
 - 3-4. DIELECTRIC WITHSTANDING : 300V
4. ENVIRONMENTAL PERFORMANCE:
 - 4-1. OPERATING TEMPERATURE: -40°C ~ +105°C.
5. PACKAGE SPEC: PE BAG
6. P/N:

PH2005 20 M 0-2 XX 1 X X X 15

SERIES NO: _____ HOUSING: 1-PA9T

HEIGHT: _____ COLOR: A-BLACK

20: 2.0mm

MALE FEMALE: _____ PLATING: A-ALL AU G/F

M-MALE

ANGLE: _____ 0-180°

ROW NO: _____ 2-DOUBLE ROW

PIN Q'PY: _____ TERMIPOINT: 1-DIP

04~80

REV.	REVISION RECORD	DATE		GENERAL TOLERANCE		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:		
AO	NEW RELEASE	22.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.15	PH200520M0-2XX1XXX15	ENDE05		
			UNIT: mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	22.10.15	TITLE:		REV: A0	SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	LX_HOU	22.10.15	Pitch 2.00mm 180° 双排 DIP 排针 H2.0 PA5.3			