
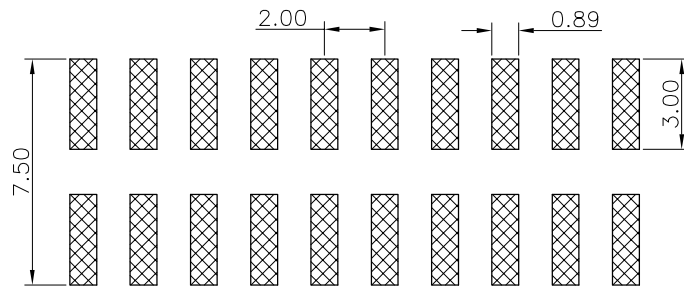
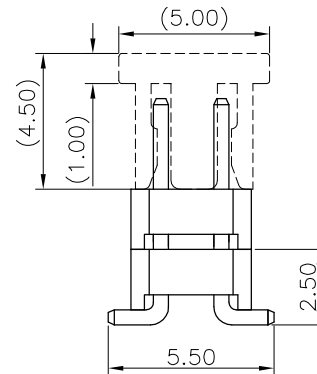
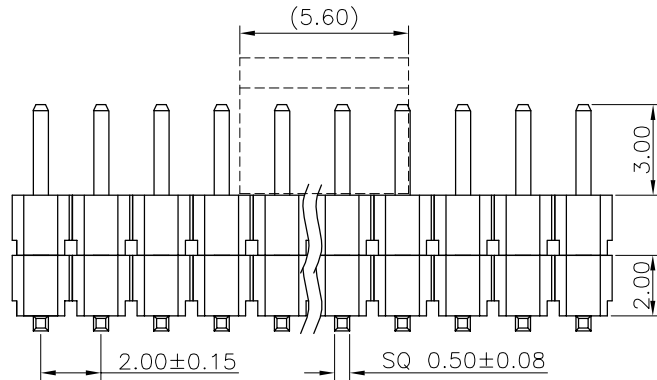


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

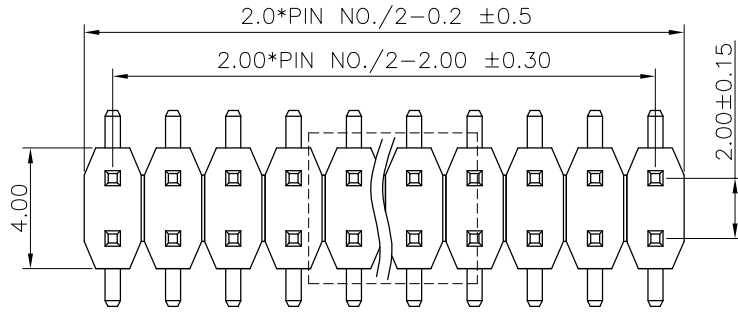

RECOMMEND P. C. B LAYOUT

PCB TOLERANCE: ±0.05 (TOP VIEW)

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: UL94V-0

1-2.CONTACTS: BRASS

2.PLATING SPECIFICATION:

2-1.CONTACTS:

GOLD FLASH OVER NICKEL

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 2A

3-2.CONTACT RESISTANCE: 30 mΩ MAX

3-3.INSULATION RESISTANCE: 1000MΩ Min

3-4.DIELECTRIC WITHSTANDING : 300V

4.ENVIRONMENTAL PERFORMANCE:

4-1.OPERATING TEMPERATURE: -40°C~+105°C.

5.PACKAGE SPEC: REEL

6.P/N:

PH2005 20 M 0-2 XX 2 X X X 12

SERIES NO:

HEIGHT:

20: 2.0mm

MALE FEMALE:

M-MALE

ANGLE:

0-180°

ROW NO:

2-DOUBLE ROW

PIN Q'PY:

02~80

HOUSING:
1-PA6T

COLOR:
A-BLACK

PLATING:
A-ALL AU G/F

TERMIPOINT:
2-SMT

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH200520M0-2XX2XXX12	DWG.NO: ENDE05	 WanLian Technology Co., Ltd
A0	NEW RELEASE	22.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	22.10.15			
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	22.10.15	TITLE: Pitch 2.00mm 180° 双排H2.0W4.0 双塑排针 SMT+CAP PA3.0		
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	LX_HOU	22.10.15			