
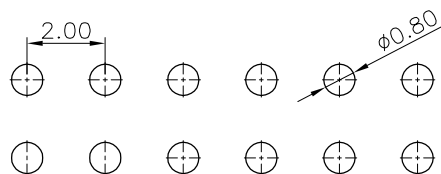
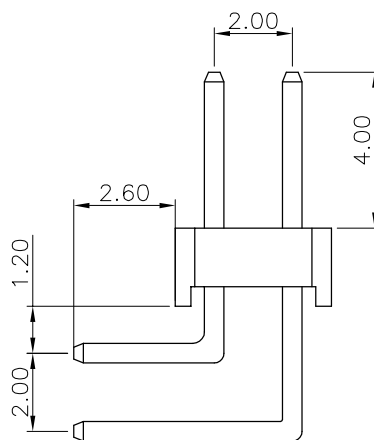
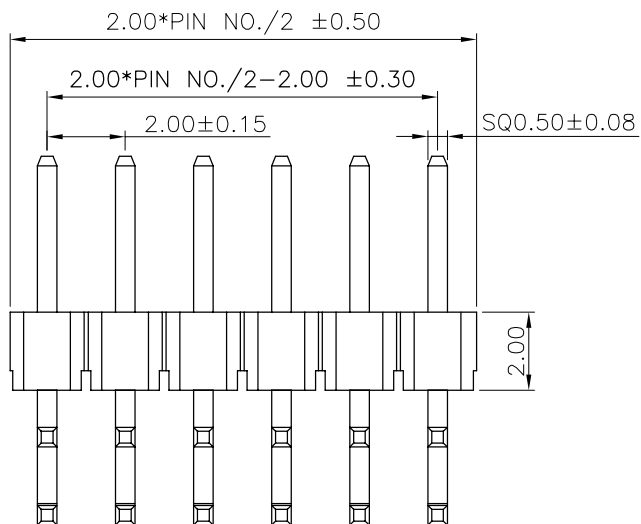


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

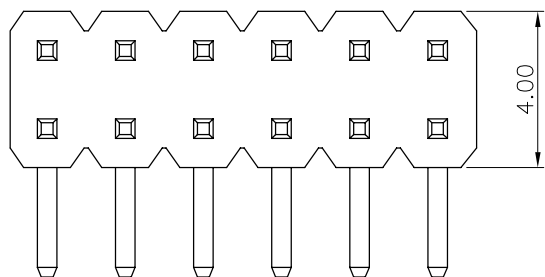

RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ±0.05

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: UL94V-0

1-2.CONTACTS: BRASS

2.PLATING SPECIFICATION:

2-1.CONTACTS:

Au 1u" PLATED OVER ALL,

Ni 40u" . UNDER PLATED OVER ALL.

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 2A

3-2.CONTACT RESISTANCE: 30 mΩ MAX

3-3.INSULATION RESISTANCE: 1000MΩ Min

3-4.DIELECTRIC WITHSTANDING : 300V

4.ENVIRONMENTAL PERFORMANCE:

4-1.OPERATING TEMPERATURE: -40°C~+105°C.

5.PACKAGE SPEC: PE BAG

6.P/N:

PH2005 20 M 9-2 XX 1 X X X 06
 SERIES NO: _____ HOUSING: 1-PA9T
 HEIGHT: _____ COLOR: A-BLACK
 20: 2.0mm
 MALE FEMALE: _____ PLATING: A-ALL AU G/F
 M-MALE 1-G/F
 ANGLE: _____ 9-90° C-BRIGHT TIN
 ROW NO: _____
 2-DOUBLE ROW
 PIN Q' PY: _____ TERMIPOINT: 1-DIP
 02~80

| REV. | REVISION RECORD | DATE | UNIT:mm | GENERAL TOLERANCES | | SCALE: 1:1 | NAME | DATE | PART.NO: | DWG.NO: | |
|------|-----------------|----------|-----------|--------------------|----------|---------------|----------|----------|---------------------------------|---------|------------|
| A0 | NEW RELEASE | 21.10.15 | | LINEAR | ANGLES | APPROVED | Wang_jr | 21.10.15 | PH200520M9-2XX1XXX06 | ENDE05 | |
| | | | 0.00±0.25 | X'±3° | DESIGNER | Gao_Han | 21.10.15 | TITLE: | | REV: A0 | SHEET: 1/1 |
| | | | SIZE: A4 | 0.000±0.10 | X'X' ±2° | DRAWN | Gao_Han | 21.10.15 | 2.0双排针 H2.0W4.0 90° DIP弯凹槽PC2.6 | | |