

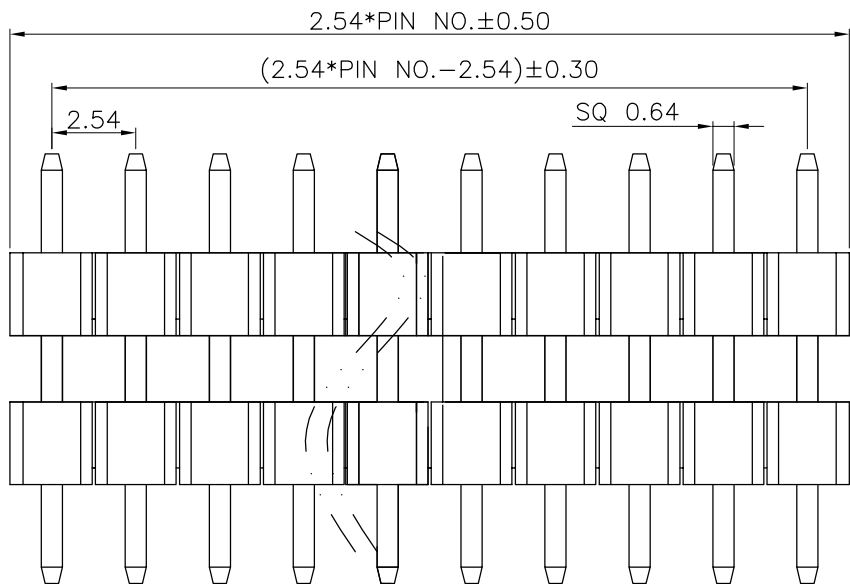


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

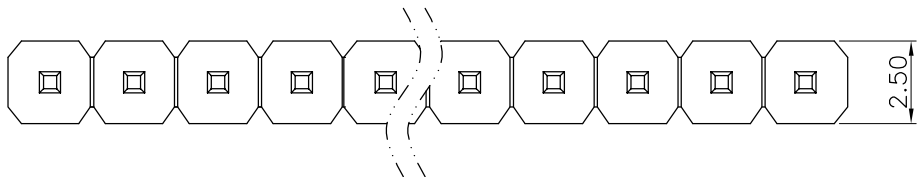

RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ±0.05

NOTE:

- MATERIAL SPECIFICATION:
 - HOUSING: PA6T,UL94V-0
 - CONTACTS: BRASS
- PLATING SPECIFICATION:
 - CONTACTS: GOLD FLASH OVER NICKEL
- ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 3A
 - CONTACT RESISTANCE: 30 mΩ MAX
 - INSULATION RESISTANCE: 1000MΩ Min
 - DIELECTRIC WITHSTANDING : 500V
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+105°C.
- PACKAGE SPEC: PE BAG
- P/N:

PH2541 25 M 0-1 XX 1 X X X 01

 - SERIES NO: PH2541
 - HEIGHT: 25: 2.5mm
 - MALE FEMALE: M-MALE
 - ANGLE: 0-180°
 - ROW NO: 1-SINGLE ROW
 - PIN Q'PY: 01~40
 - HOUSING: 1-PA6T, 2-PA6T+HF, 3-PBT
 - COLOR: A-BLACK
 - PLATING: A-ALL AU G/F
 - TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	TITLE:	REV: A0	SHEET: 1/1
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1							
				0.00±0.25	X'±3°	APPROVED	Wang_jr	21.10.15	PH254125M0-1XX1XXX01	ENDE05	Pitch 2.54mm 180° 单排 DIP 双塑H=7.0排针 L=13.0MM		
			SIZE: A4	0.000±0.10	X'X' ±2°	DESIGNER	Gao_Han	21.10.15					
						DRAWN	Gao_Han	21.10.15					

