

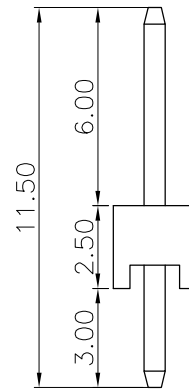
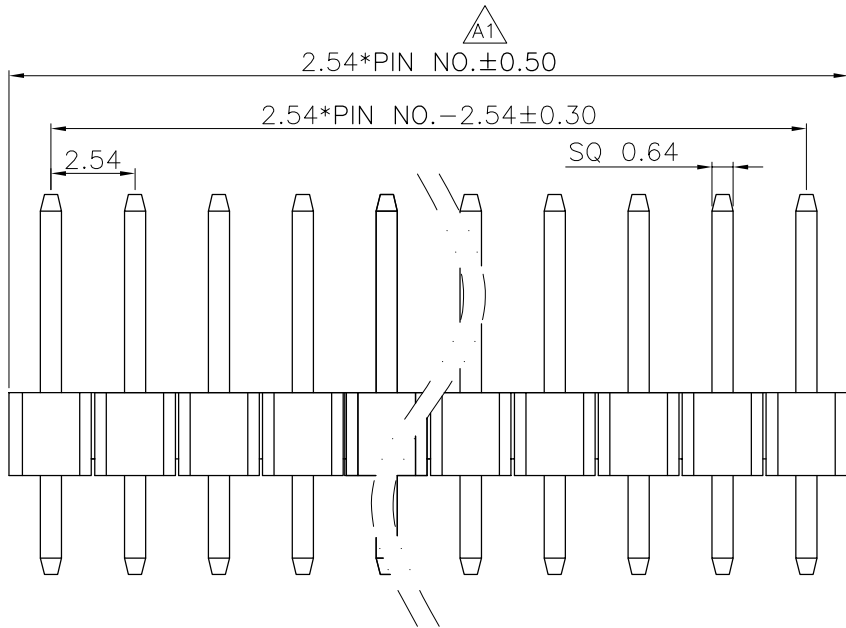


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS+HF

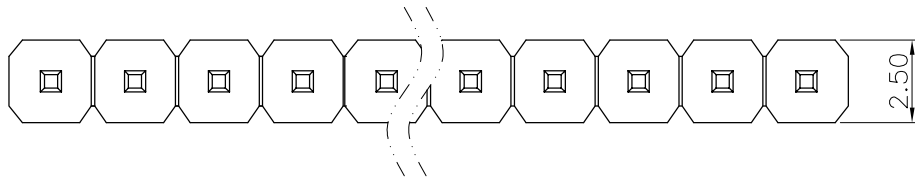

RECOMMENDED P. C. B LAYOUT
P. C. B TOLERANCE: ±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA6T,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A
 - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

PH2541 25 M 0-1 XX 1 X X X 02

SERIES NO: PH2541 25 M 0-1 XX 1 X X X 02

HEIGHT: 25: 2.5mm

MALE FEMALE: M-MALE

ANGLE: 0-180°

ROW NO: 1-SINGLE ROW



PIN Q'PY: 02~40

HOUSING: 1-PA6T

COLOR: A-BLACK

PLATING: A-ALL AU G/F

TERMIPOINT: 1-DIP

REV.	REVISION RECORD	DATE	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.15	 LINEAR 0.0±0.35	ANGLES X'REF±6°	1:1	Wang_jr	23.11.08	PH254125M0-1XX1XXX02	ENDE05	
A1	CHANGE TOLERANCE	23.11.08			UNIT:mm 0.00±0.25 SIZE: A4	X'±3° X'X' ±2°	APPROVED	Gao_Han	23.11.08	
			DESIGNER	DRAWN			LX_HOU	23.11.08		