

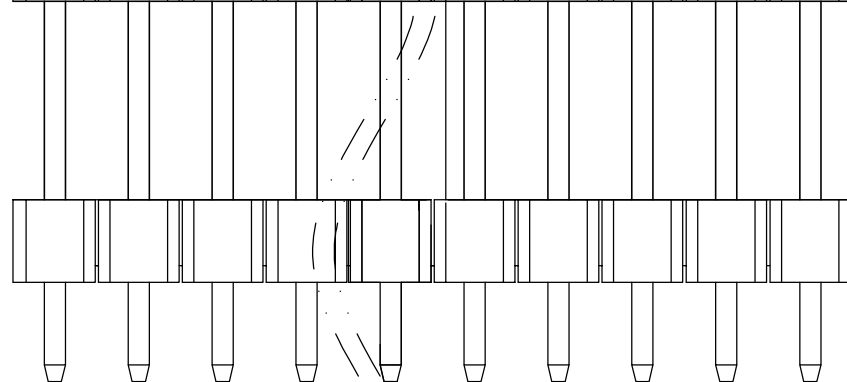
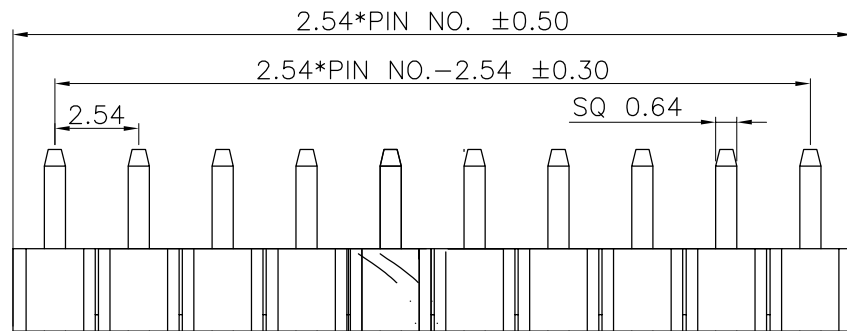


The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS

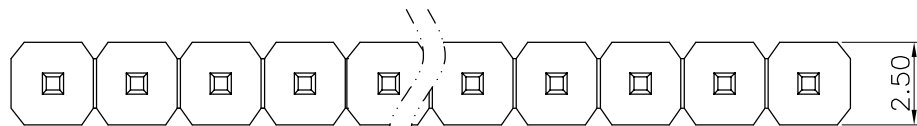

RECOMMENDED P. C. B LAYOUT

P. C. B TOLERANCE: ±0.05

NOTE:

1.MATERIAL SPECIFICATION:

1-1.HOUSING: PA6T,UL94V-0

1-2.CONTACTS: BRASS

2.PLATING SPECIFICATION:

2-1.CONTACTS:

GOLD FLASH OVER NICKEL

3.ELECTRICAL PERFORMANCE:

3-1.CURRENT RATING: 3A

3-2.CONTACT RESISTANCE: 30 mΩ MAX

3-3.INSULATION RESISTANCE: 1000MΩ Min

3-4.DIELECTRIC WITHSTANDING : 500V


4.ENVIRONMENTAL PERFORMANCE:

4-1.OPERATING TEMPERATURE: -40°C~+105°C.

5.PACKAGE SPEC: PE BAG

6.P/N:

PH2541 25 M 0-1 XX 1 X X X 06
 SERIES NO: _____ HOUSING: 1-PA6T
 HEIGHT: _____ COLOR: A-BLACK
 25: 2.5mm PLATING: A-ALL AU G/F
 MALE FEMALE: _____ TERMPOINT: 1-DIP
 M-MALE
 ANGLE: _____ PIN Q'PY: 02~40
 0-180°
 ROW NO: _____
 1-DOUBLE ROW

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1					
			0.00±0.25	X'±3'			Gao_Han	21.10.15	PH254125M0-1XX1XXX06	ENDE05	
			0.00±0.10	X'X' ±2'			Gao_Han	21.10.15	Pitch 2.54mm 180° 单排 DIP 双塑H=11.0排针 L=17.0MM		