
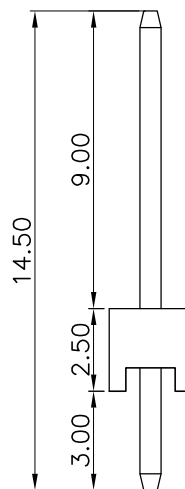
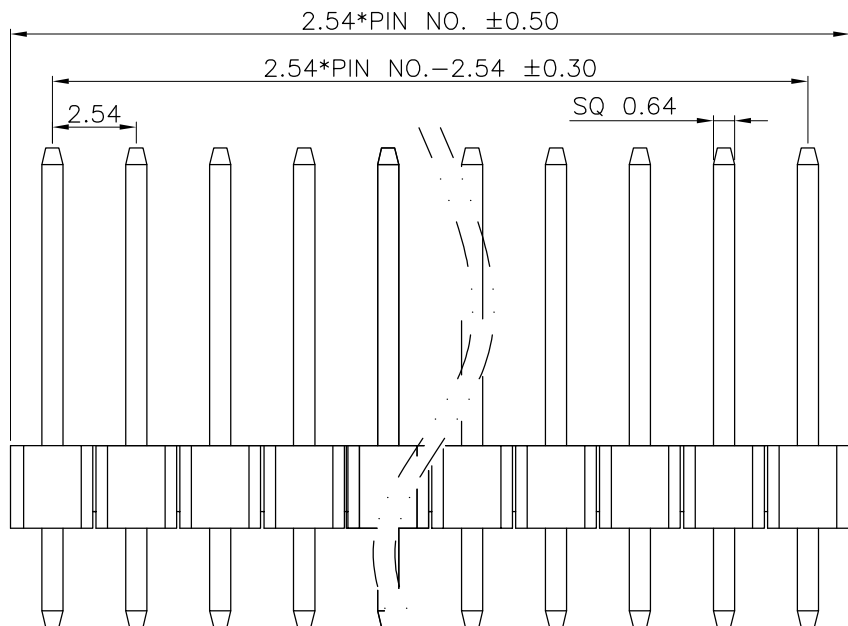


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

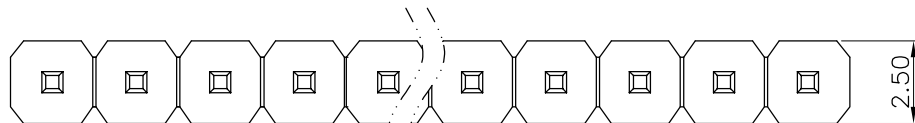

- NOTE:
- MATERIAL SPECIFICATION:
    - HOUSING: PA9T,UL94V-0
    - CONTACTS: BRASS
  - PLATING SPECIFICATION:
    - CONTACTS: GOLD FLASH OVER NICKEL
  - ELECTRICAL PERFORMANCE:
    - CURRENT RATING: 3A
    - CONTACT RESISTANCE: 30 mΩ MAX
    - INSULATION RESISTANCE: 1000MΩ Min
    - DIELECTRIC WITHSTANDING : 500V
  - ENVIRONMENTAL PERFORMANCE:
    - OPERATING TEMPERATURE: -40°C~+105°C.
  - PACKAGE SPEC: PE BAG
  - P/N:

PH2541 25 M 0-1 XX 1 X X X 11

SERIES NO: \_\_\_\_\_

HEIGHT: \_\_\_\_\_  
25: 2.5mm

MALE FEMALE: \_\_\_\_\_  
M-MALE

ANGLE: \_\_\_\_\_  
0-180°

ROW NO: \_\_\_\_\_  
1-SINGLE ROW


PIN Q'PY: \_\_\_\_\_  
01~40

HOUSING: \_\_\_\_\_  
1-PA9T

COLOR: \_\_\_\_\_  
A-BLACK

PLATING: \_\_\_\_\_  
A-ALL AU G/F

TERMIPOINT: \_\_\_\_\_  
1-DIP



RECOMMENDED P. C. B LAYOUT  
P. C. B TOLERANCE: ±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15	PH254125M0-1XX1XXX11	ENDE05	
			UNIT:mm	0.00±0.25	X'±3°	DESIGNER	Gao_Han	21.10.15	TITLE:		REV: A0    SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2°	DRAWN	Gao_Han	21.10.15	Pitch 2.54mm 180° 单排 DIP 单塑排针 L=14.5MM		