
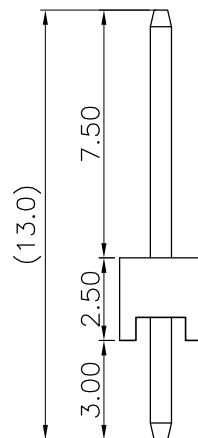
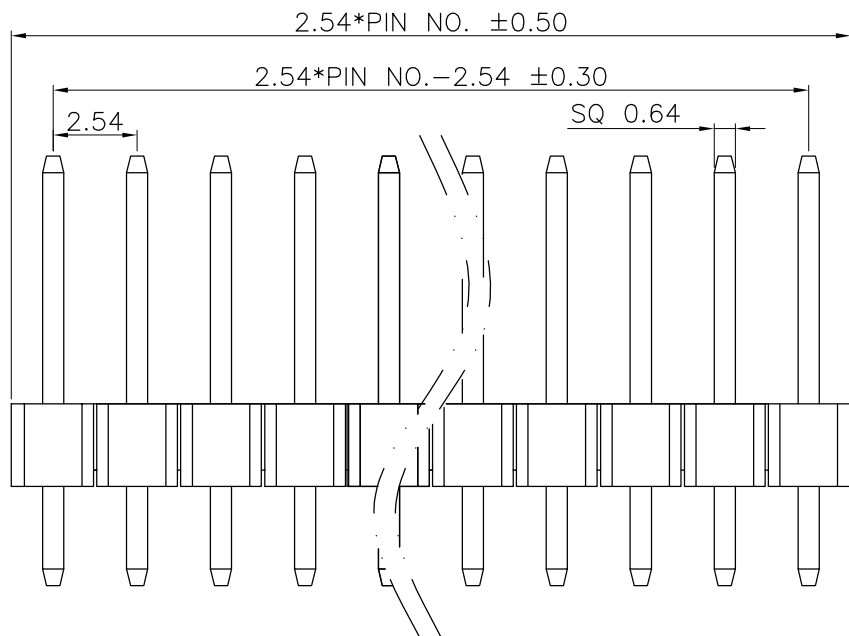


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

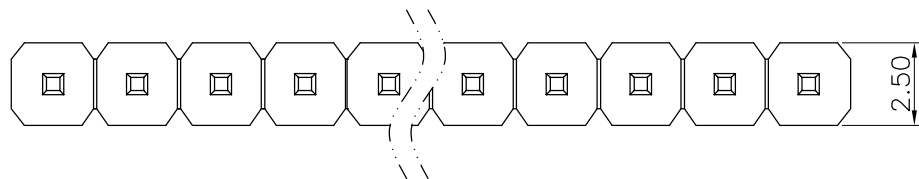

NOTE:

- 1.MATERIAL SPECIFICATION:
  - 1-1.HOUSING: PA9T,UL94V-0
  - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
  - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
  - 3-1.CURRENT RATING: 3A
  - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
  - 3-3.INSULATION RESISTANCE: 1000MΩ Min
  - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
  - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

PH2541 25 M 0-1 XX 1 X X X 17

SERIES NO: \_\_\_\_\_ HOUSING: 1-PA9T


HEIGHT: \_\_\_\_\_ 25: 2.5mm COLOR: A-BLACK

MALE FEMALE: \_\_\_\_\_ M-MALE PLATING: A-ALL AU G/F

ANGLE: \_\_\_\_\_ 0-180°

ROW NO: \_\_\_\_\_ 1-SINGLE ROW

PIN Q'PY: \_\_\_\_\_ 01~40 TERMIPOINT: 1-DIP



Recommended PCB Layout  
TOLERANCE:±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO:	DWG.NO:	<p>WanLian Technology Co., Ltd</p>
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15	PH254125M0-1XX1XXX17	ENDE05	
			0.0±0.35	X'REF±6°	DESIGNER	Gao_Han	21.10.15	TITLE:			
			UNIT:mm	X'±3°	DRAWN	Gao_Han	21.10.15	Pitch 2.54mm 180° 单排 DIP 单塑排针 L=13.0MM			
			SIZE: A4	0.000±0.10	X'X' ±2°					REV: A0	SHEET: 1/1