
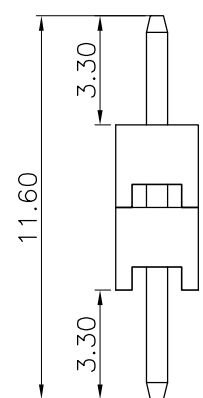
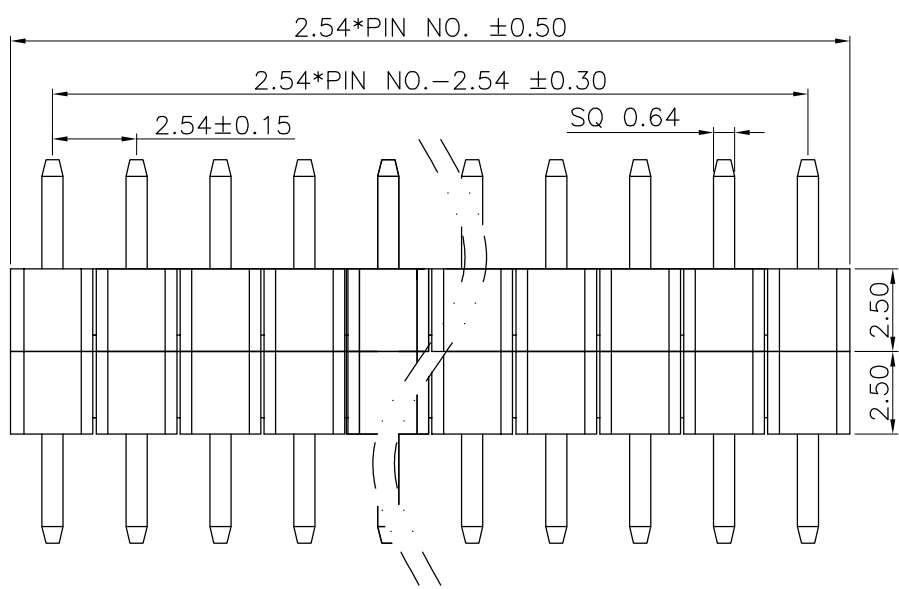


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

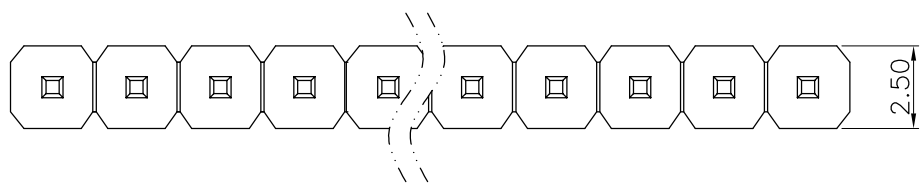


- NOTE:
- MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA6T,UL94V-0
 - 1-2.CONTACTS: BRASS
 - PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
 - ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A
 - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
 - ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
 - PACKAGE SPEC: PE BAG
 - P/N:

PH2541 25 M 0-1 XX 1 X X X 22

SERIES NO: PH2541
 HEIGHT: 25: 2.5mm
 MALE FEMALE: M-MALE
 ANGLE: 0-180°
 ROW NO: 1-SINGLE ROW
 PIN Q'PY: 01~40

HOUSING: 1-PA6T
 COLOR: A-BLACK
 PLATING: A-ALL AU G/F
 TERMIPOINT: 1-DIP

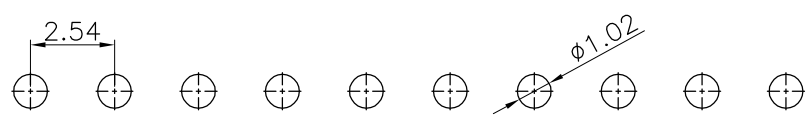

Recommended PCB Layout
 TOLERANCE:±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH254125M0-1XX1XXX22	DWG.NO: ENDE05	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15			
			UNIT:mm	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE: Pitch 2.54mm 180° 单排 DIP 双塑排针 L=11.6MM			
			SIZE: A4	X'X' ±2'	DRAWN	Gao_Han	21.10.15				
										REV: A0	SHEET: 1/1