


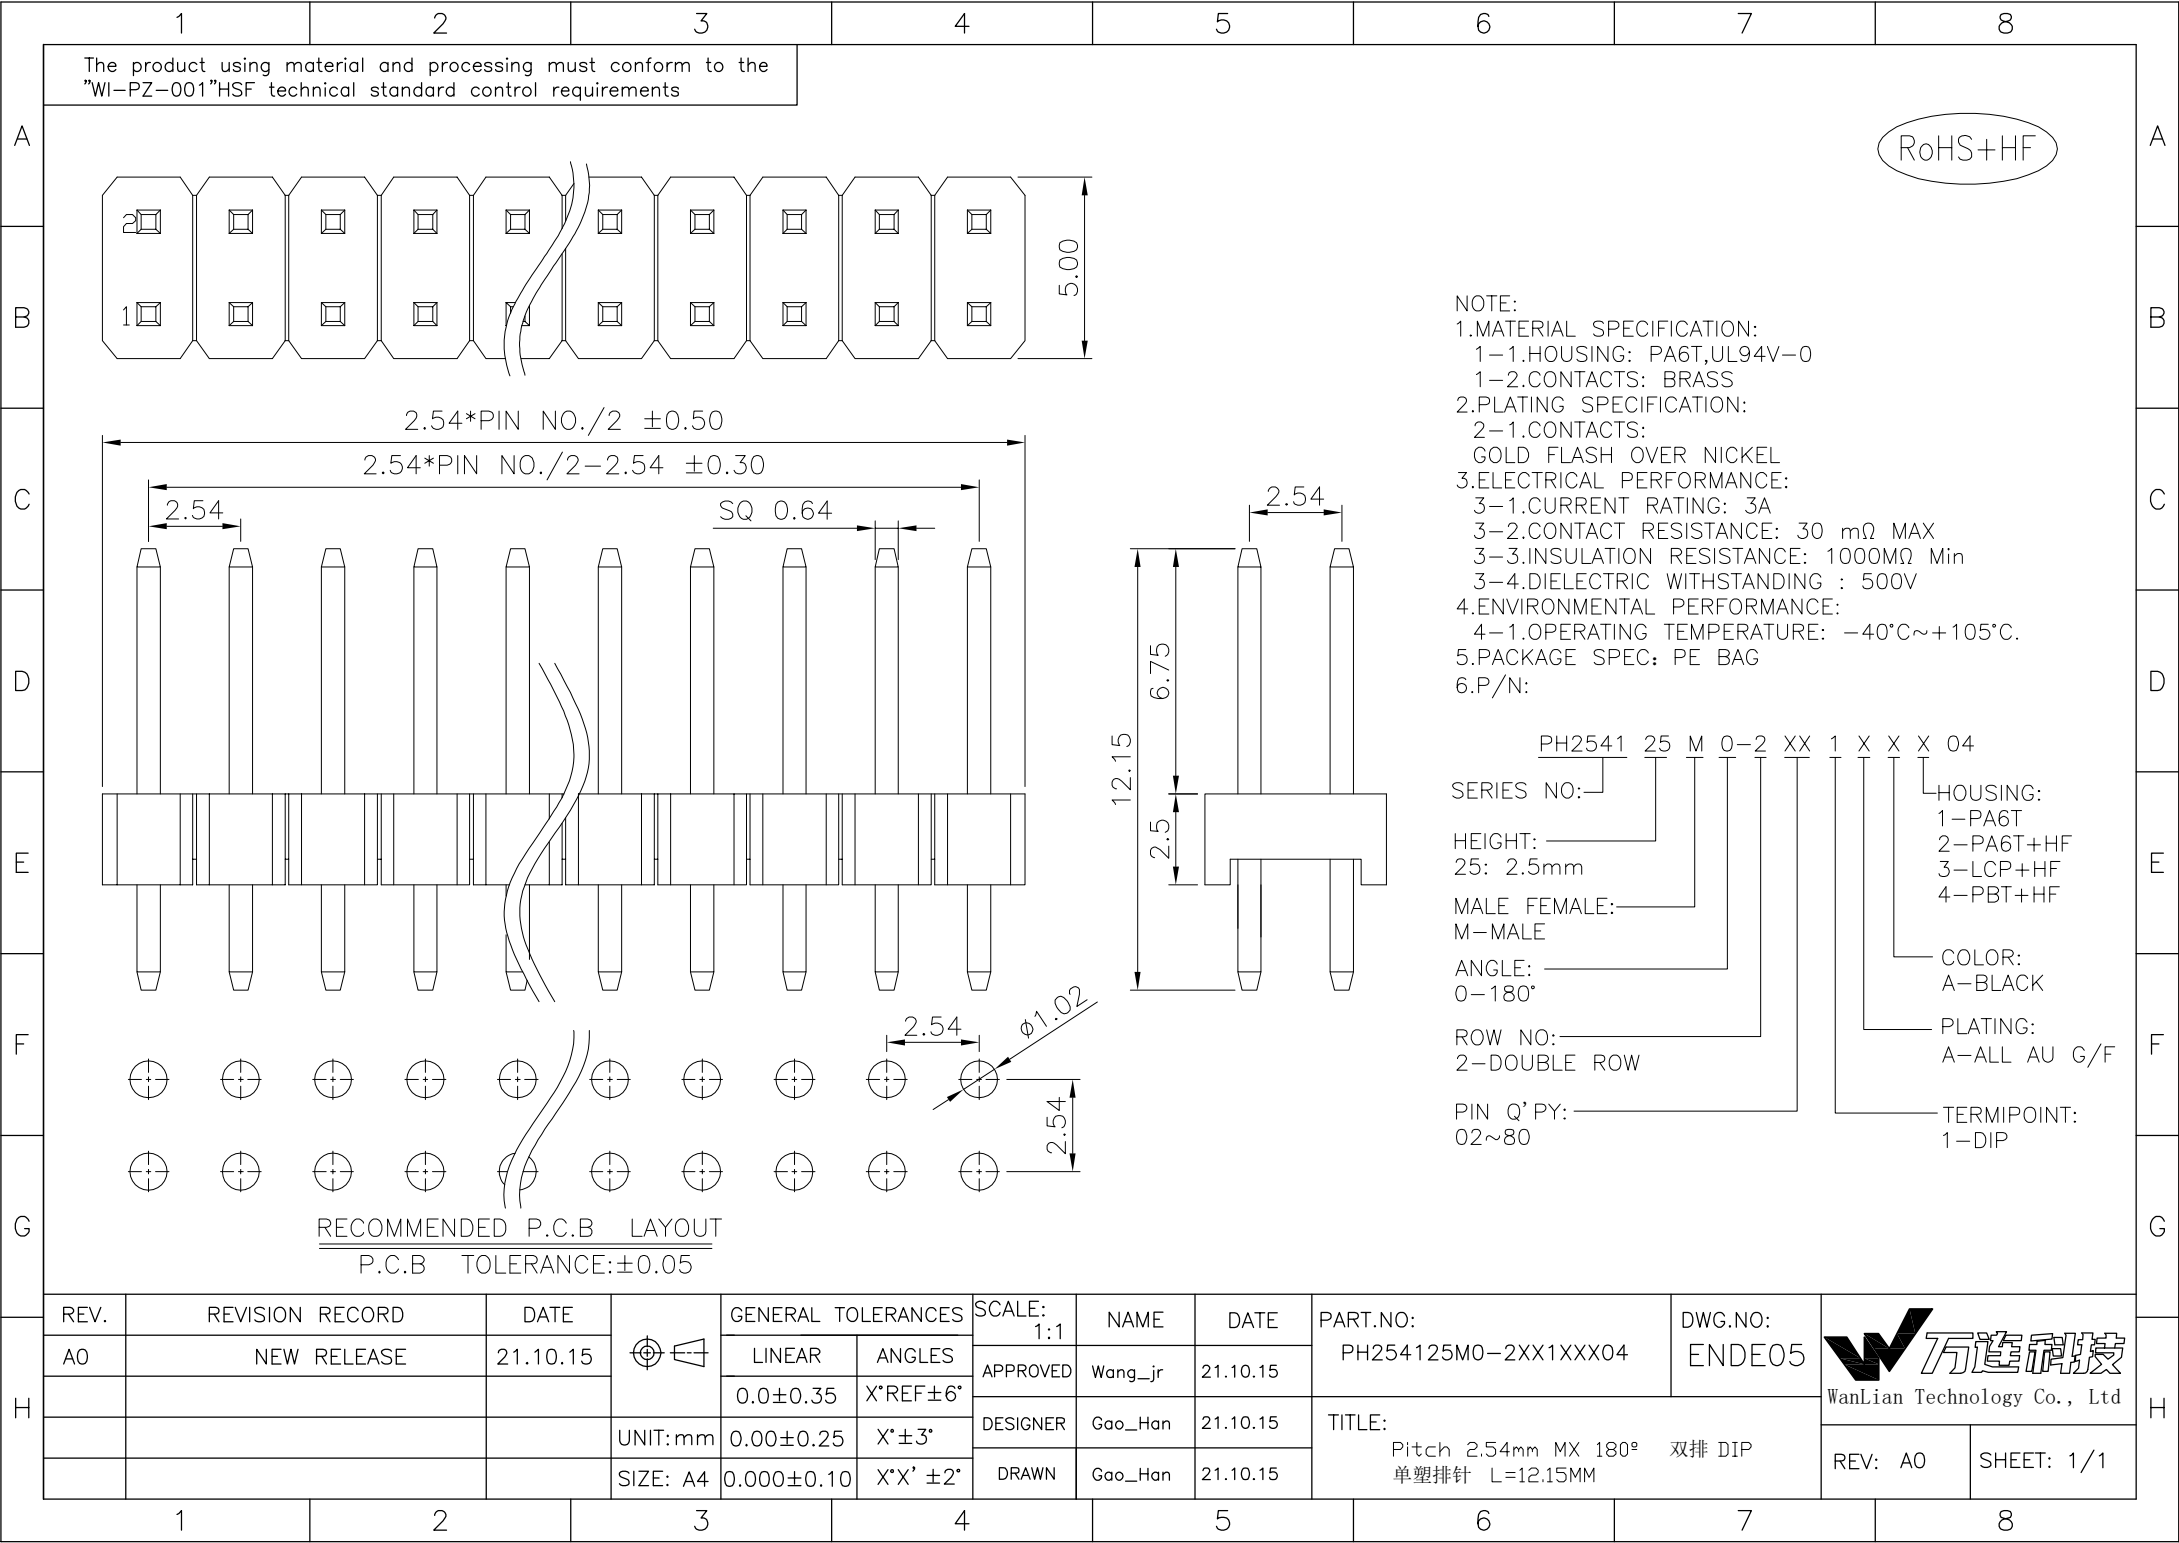

The product using material and processing must conform to the "WI-PZ-001" HSF technical standard control requirements

RoHS+HF

NOTE:
1. MATERIAL SPECIFICATION:
1-1. HOUSING: PA6T, UL94V-0
1-2. CONTACTS: BRASS
2. PLATING SPECIFICATION:
2-1. CONTACTS:
GOLD FLASH OVER NICKEL
3. ELECTRICAL PERFORMANCE:
3-1. CURRENT RATING: 3A
3-2. CONTACT RESISTANCE: 30 mΩ MAX
3-3. INSULATION RESISTANCE: 1000MΩ Min
3-4. DIELECTRIC WITHSTANDING: 500V
4. ENVIRONMENTAL PERFORMANCE:
4-1. OPERATING TEMPERATURE: -40°C~+105°C.
5. PACKAGE SPEC: PE BAG
6. P/N:

PH2541 25 M 0-2 XX 1 X X X 04
SERIES NO: _____
HEIGHT: _____
25: 2.5mm
MALE FEMALE: _____
M-MALE
ANGLE: _____
0-180°
ROW NO: _____
2-DOUBLE ROW
PIN Q'PY: _____
02~80
HOUSING:
1-PA6T
2-PA6T+HF
3-LCP+HF
4-PBT+HF
COLOR:
A-BLACK
PLATING:
A-ALL AU G/F
TERMIPOINT:
1-DIP

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE: ±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:		
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1			PH254125M0-2XX1XXX04	ENDE05		
				0.0±0.35	X°REF±6°	APPROVED	Wang_jr	21.10.15				
				0.00±0.25	X°±3°	DESIGNER	Gao_Han	21.10.15	TITLE:			
				0.000±0.10	X°X'±2°	DRAWN	Gao_Han	21.10.15	Pitch 2.54mm MX 180° 双排 DIP 单塑排针 L=12.15MM		REV: A0	SHEET: 1/1