
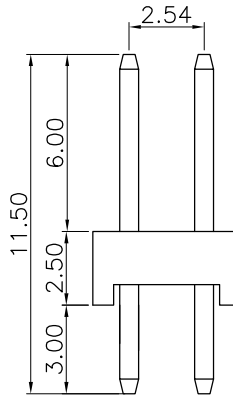
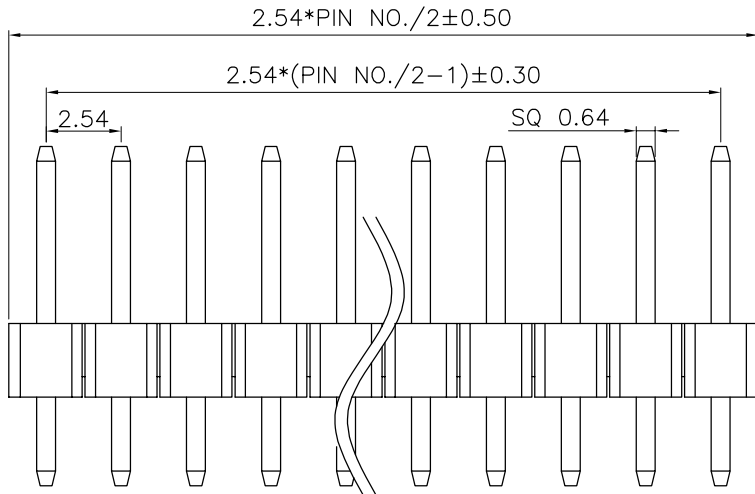


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

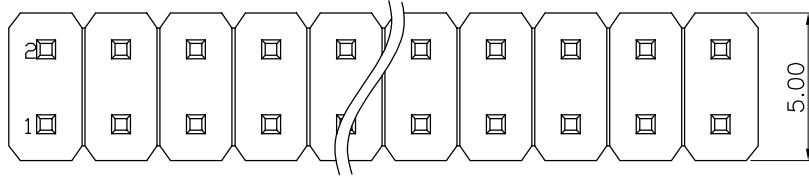

NOTE:

- MATERIAL SPECIFICATION:
 - HOUSING: THERMOPLASTIC,UL94V-0
 - CONTACTS: BRASS
- PLATING SPECIFICATION:
 - CONTACTS: GOLD FLASH OVER NICKEL
- ELECTRICAL PERFORMANCE:
 - CURRENT RATING: 3A
 - CONTACT RESISTANCE: 30 mΩ MAX
 - INSULATION RESISTANCE: 1000MΩ Min
 - DIELECTRIC WITHSTANDING : 500V
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -40°C~+105°C.
- PACKAGE SPEC: PE BAG
- P/N:

PH2541 25 M 0-2 XX 1 X X X 08

SERIES NO: _____ HOUSING:
 1-PA6T (RoHS)
 2-LCP (RoHS)
 3-PBT (RoHS)
 4-PA6T (RoHS+HF)

HEIGHT: _____ COLOR:
 25: 2.5mm A-BLACK


MALE FEMALE: _____ PLATING:
 M-MALE A-ALL AU G/F

ANGLE: _____ TERMPOINT:
 0-180° 1-DIP


ROW NO: _____

PIN Q'PY: _____

02~80

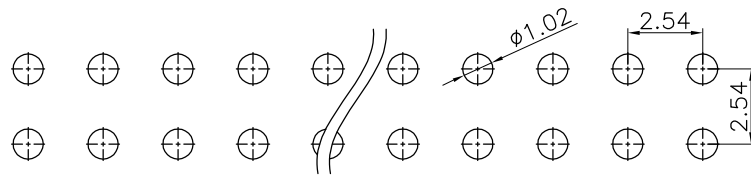

RECOMMENDED P.C.B LAYOUT
 P.C.B TOLERANCE:±0.05

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1	Wang_jr	21.10.15	PH254125M0-2XX1XXX08	ENDE05	
			0.00±0.25	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE:	Pitch 2.54mm 180° 双排 DIP		REV: A0
			0.00±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15	单塑排针 L=11.5MM		SHEET: 1/1	