
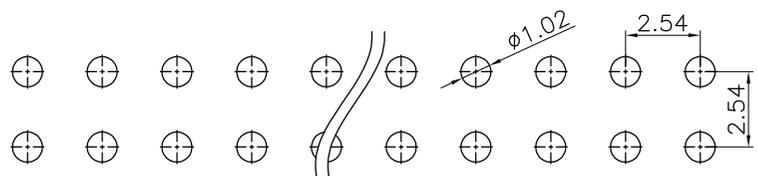
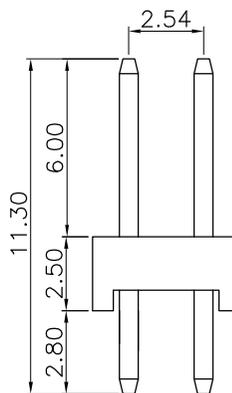
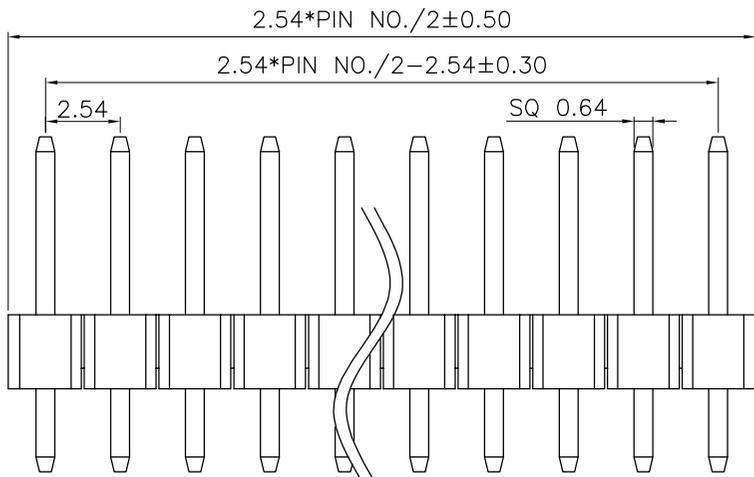


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

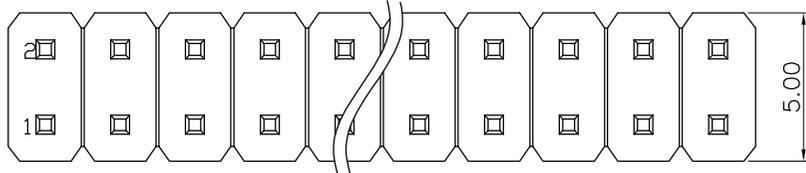

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE: ±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: PA6T,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A
 - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

PH2541 25 M 0-2 XX 1 X X X 20

SERIES NO: _____ HOUSING: 1-PA6T

HEIGHT: _____ COLOR: A-BLACK

25: 2.5mm PLATING: A-ALL AU G/F

MALE FEMALE: _____

M-MALE

ANGLE: _____

0-180°

ROW NO: _____

2-DOUBLE ROW

PIN Q'PY: _____ TERMPIPOINT: 1-DIP


02~80

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	TITLE:	REV: A0	SHEET: 1/2
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1							
				0.0±0.35	X'REF±6°		Wang_jr	21.10.15					
				0.00±0.25	X'±3°		Gao_Han	21.10.15					
				0.000±0.10	X'X' ±2°		Gao_Han	21.10.15					
										Pitch 2.54mm 180° 双排 DIP			
										单塑排针 L=11.3MM			




The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements


RoHS




产品




产品装入PE袋、内放一包干燥剂、，
如图所示；用封口机封口，外贴一
张数量标签，



将PE袋装好的产品放入内箱中，每箱10袋

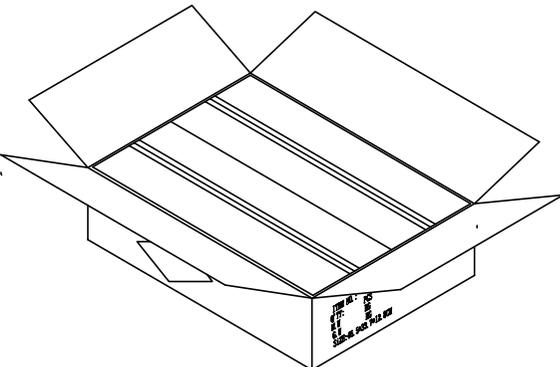

将封好的内箱装入外箱中，1外箱装2内箱

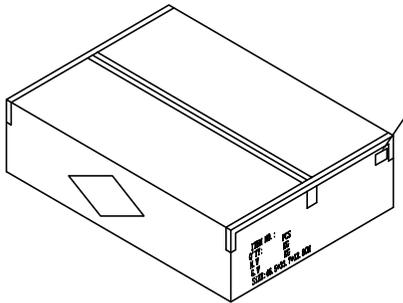

外箱封口“工”字型，

备注：

- 1: 包装数量：10袋/内箱；
20袋/外箱；
- 2: 纸箱规格：内箱：45.0*16.0*11.5CM
外箱：46.5*33.7*12.8CM

双排		单排	
PIN数	PCS/袋	PIN数	PCS/袋
1-----5	500	1-----5	2000
6-----10	300	6-----10	1000
11-----15	200	11-----15	500
16-----20	150	16-----20	300
21-----25	100	21-----25	200
26-----30	100	26-----30	100
31-----35	50	31-----35	100
36-----40	50	36-----40	50

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1	Wang_jr	21.10.15				PH254125M0-2XX1XXX20
			0.0±0.35	X'REF±6'	APPROVED	Gao_Han	21.10.15	TITLE:				
			UNIT:mm	X'±3'	DESIGNER	Gao_Han	21.10.15	包装规范				
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15			REV: A0	SHEET: 2/2