
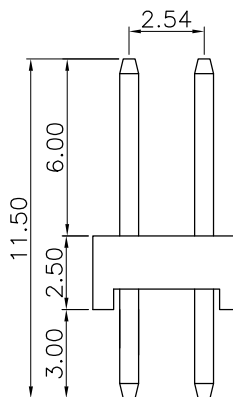
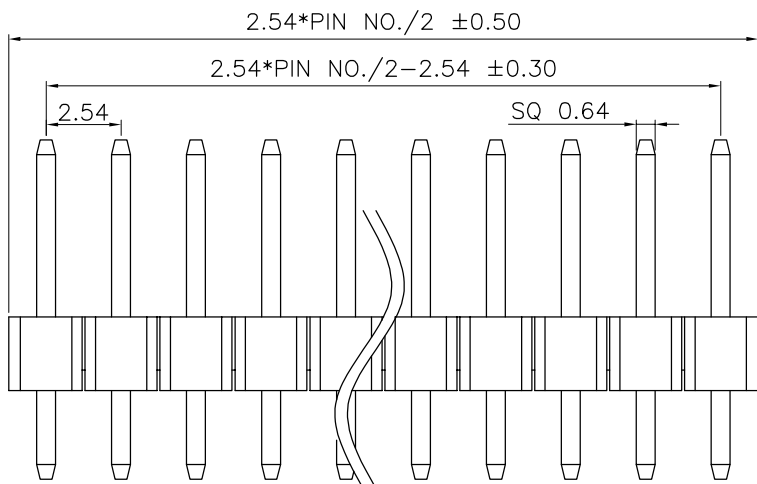


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

RoHS

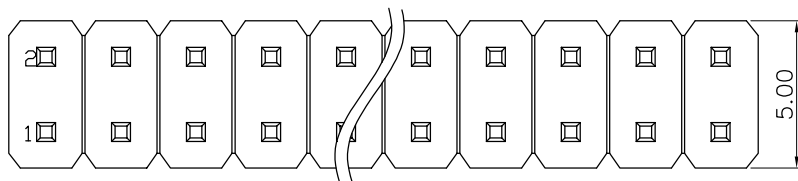

NOTE:

- 1.MATERIAL SPECIFICATION:
1-1.HOUSING: THERMOPLASTIC,UL94V-0
1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
2-1.CONTACTS:
GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
3-1.CURRENT RATING: 3A
3-2.CONTACT RESISTANCE: 30 mΩ MAX
3-3.INSULATION RESISTANCE: 1000MΩ Min
3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

PH2541 25 M 0-2 XX 1 X X X 21

SERIES NO: _____ HOUSING: 1-PA6T


HEIGHT: _____ 25: 2.5mm COLOR: A-BLACK

MALE FEMALE: _____ PLATING: A-ALL AU G/F

ANGLE: _____ 0-180° TERMIPOINT: 1-DIP

ROW NO: _____ PIN Q'PY: 04~80

2-DOUBLE ROW

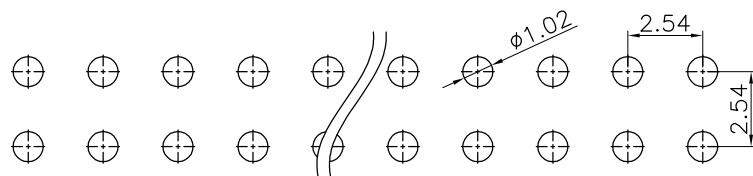

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE:±0.05

REV.	REVISION RECORD	DATE		GENERAL TOLERANCES		SCALE: 1:1	NAME	DATE	PART.NO: PH254125M0-2XX1XXX21	DWG.NO: ENDE05	 WanLian Technology Co., Ltd	
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	APPROVED	Wang_jr	21.10.15				
			UNIT:mm	0.00±0.25	X'±3'	DESIGNER	Gao_Han	21.10.15	TITLE: Pitch 2.54mm 180° 双排 DIP 单塑排针 L=11.5MM	REV: A0		SHEET: 1/1
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15				