
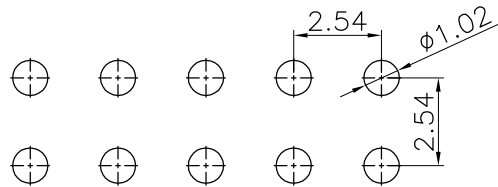
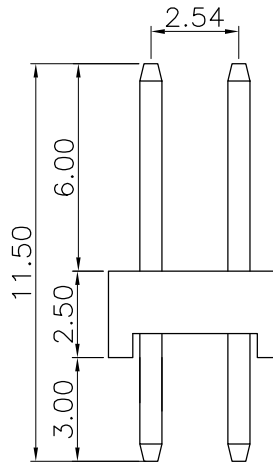
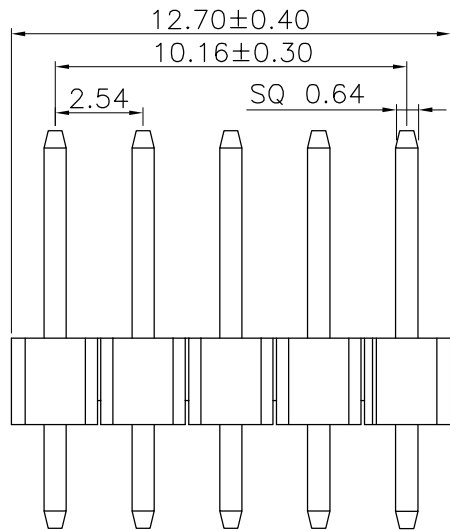


The product using material and processing must conform to the "WI-PZ-001"HSF technical standard control requirements

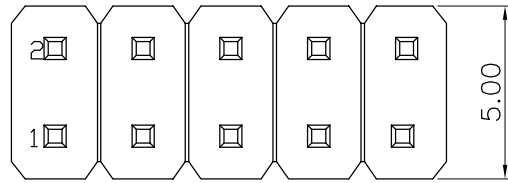

RECOMMENDED P.C.B LAYOUT
P.C.B TOLERANCE:±0.05

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1-1.HOUSING: THERMOPLASTIC,UL94V-0
 - 1-2.CONTACTS: BRASS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS: GOLD FLASH OVER NICKEL
- 3.ELECTRICAL PERFORMANCE:
 - 3-1.CURRENT RATING: 3A
 - 3-2.CONTACT RESISTANCE: 30 mΩ MAX
 - 3-3.INSULATION RESISTANCE: 1000MΩ Min
 - 3-4.DIELECTRIC WITHSTANDING : 500V
- 4.ENVIRONMENTAL PERFORMANCE:
 - 4-1.OPERATING TEMPERATURE: -40°C~+105°C.
- 5.PACKAGE SPEC: PE BAG
- 6.P/N:

PH2541 25 M 0-2 XX 1 X X X 26

SERIES NO: _____

HEIGHT: _____

25: 2.5mm

MALE FEMALE: _____

M-MALE

ANGLE: _____

0-180°

ROW NO: _____

2-DOUBLE ROW

PIN Q'PY: _____

02~80

HOUSING:

- 1-PA6T (RoHS)
- 2-LCP (RoHS)
- 3-PBT (RoHS)
- 4-PA6T (RoHS+HF)

COLOR:

- A-BLACK

PLATING:

- A-ALL AU G/F

TERMIPOINT:

- 1-DIP

REV.	REVISION RECORD	DATE	UNIT:mm	GENERAL TOLERANCES		SCALE:	NAME	DATE	PART.NO:	DWG.NO:	REV: A0	SHEET: 1/1
A0	NEW RELEASE	21.10.15		LINEAR	ANGLES	1:1						
				0.00±0.25	X'±3'	DESIGNER	Gao_Han	21.10.15	Pitch 2.54mm 180° 双排 DIP 2X5P 单塑排针 空第10P L=11.5MM			
			SIZE: A4	0.000±0.10	X'X' ±2'	DRAWN	Gao_Han	21.10.15				



WanLian Technology Co., Ltd